

产品规格书

SAP料号	SAP part No. :	10201T6813H50011A0
产品型号	Product P/N :	SK6813HV-09-6P-003
样品号	SAP part No. :	OP00138B-004
客户料号	Client P/N :	NA
版本号	Version No. :	B/0
时 间	Sending Date :	2024-06-13

Customer approval			Opsco approval		
CHECK	APPROVE	CONFIRM	DRAW	CHECK	APPROVE
			吴东	周凯	朱更生
Stamp			Stamp		



*使用我司产品前，请检索我司官网核对规格书版本，产品规格书版本更新，恕不能及时相告，请以官网最新资料为准。
*Before using our products, please search our official website to verify the version of the specification sheet. The product specification sheet version is updated, and we apologize for any inconvenience caused. Please refer to the latest information on the official website for accuracy.
*该版权及产品最终解释权归东莞市欧思科光电科技有限公司所有，如有特殊规格要求，请联系我司工程人员。
*The copyright and final interpretation rights of the product belong to Dongguan OPSCO Optoelectronic Technology Co., Ltd. If there are special specification requirements, please contact our engineering personnel.

目 录 Catalogue

1、产品概述 Overview	3
2、主要应用 Main applications	3
3、产品命名一般说明 General instructions for product naming	3
4、机械尺寸 Mechanical dimensions	4
5、引脚功能说明 Pin Function Description	4
6、PCB建议焊盘尺寸 PCB recommended pad size	5
7、IC极限参数 IC limit parameter	5
8、GRB LED光电参数 GRB LED Optoelectronic parameters	6
9、IC电气参数 IC electrical parameters	6
10、数据传输时间 Data transmission time	7
11、数据传输方式 Data transmission method	7
12、时序波形图 Time series waveform diagram	8
13、24bit数据结构 24 bit data structure	8
14、光电特性 Photoelectric characteristic	9
15、包装标准 Packaging standards	10
16、可靠性测试 Reliability testing	11

1.产品概述 Product overview:

- 工作电压：12V@9mA (OUT RGB) ；

Forward voltage: 12V@9mA (OUT RGB) ；

- 发光角度：120° ；

Typical view angle 50%:120 ° ；

- 胶体颜色：半透明；

Lens color: translucent ；

- 内置复位电路，上电不亮灯；

Built-in reset circuit, power does not light ；

- 灰度调节：256级；

Grayscale adjustment : 256 levels ；

- 单线归零码传输协议，可无限级联；

Single-line zero code transmission protocol, can be infinite cascade ；

- 数据传输频率可达800Kbps，当刷新速率30帧/秒时，级联数不小于1024点；

The data transmission frequency can reach 800Kbps, and when the refresh rate is 30 frames per second, the number of cascades is not less than 1024 points ；

- 湿敏等级：5a ；


MSL : 5a ；

- 静电ESD：2KV ；

ESD level: 2KV ；

- 符合RoHS REACH ；

RoHS and REACH-compliant ；

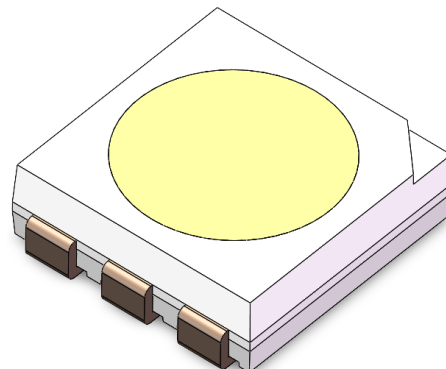

2.主要应用 Main applications:

- 消费电子产品

Consumer electronics


3. 产品命名一般说明 General instructions for product naming :

SK 6813 HV-09-6P-003

① ② ③ ④ ⑤ ⑥

①	②	③	④	⑤	⑥
系列 Series	Ic系列代码 IC series codes	工作电压 Operating voltage	电流代码 Current codes	引脚数量 Number of pins	内部编码 Internal code
默认为GRB晶片与 IC集成在一起 Default to GRB chip integrated with IC	6813:指6813系列IC ; Refers to the 6813 series IC	HV:指12V工作电压 12V working voltage	09:指电流为9mA; The current is 9 mA	P6:6PIN	003:内部编码 003:Internal code

4.机械尺寸 Mechanical dimensions:

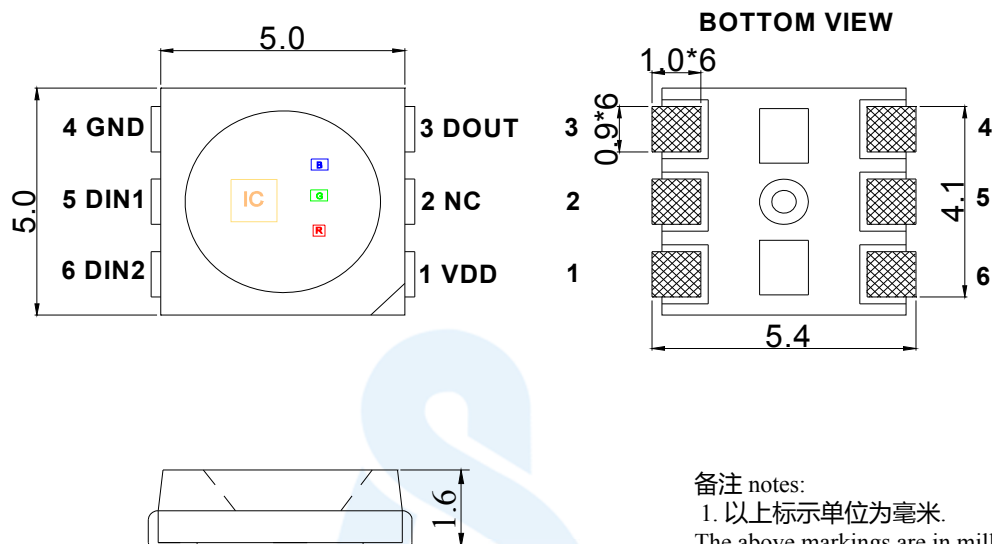


备注 notes:

1. 以上标示单位为毫米.
The above markings are in millimeters
2. 除非另外注明, 尺寸公差为 ± 0.1 毫米.
Unless otherwise specified, the dimensional tolerance is ± 0.1 millimeters

5. 引脚功能说明 Pin Function Description :

序号 Serial number	符号 Symbol	管脚名 Pin name	功能描述 Function description
1	VDD	电源 Power supply	供电管脚 Power supply pins
2	NC	空脚 Empty feet	无 None
3	DOUT	数据输出 Data output	控制数据信号输出 Control data signal output
4	GND	地 Grounds	电源接地 Power grounding
5	DIN1	数据输入 Data input	控制数据信号输入 Control data signal input
6	DIN2	热数据处理 Thermal data processing	热数据信号处理 Thermal data signal processing

6.PCB建议焊盘尺寸 PCB recommended pad size :

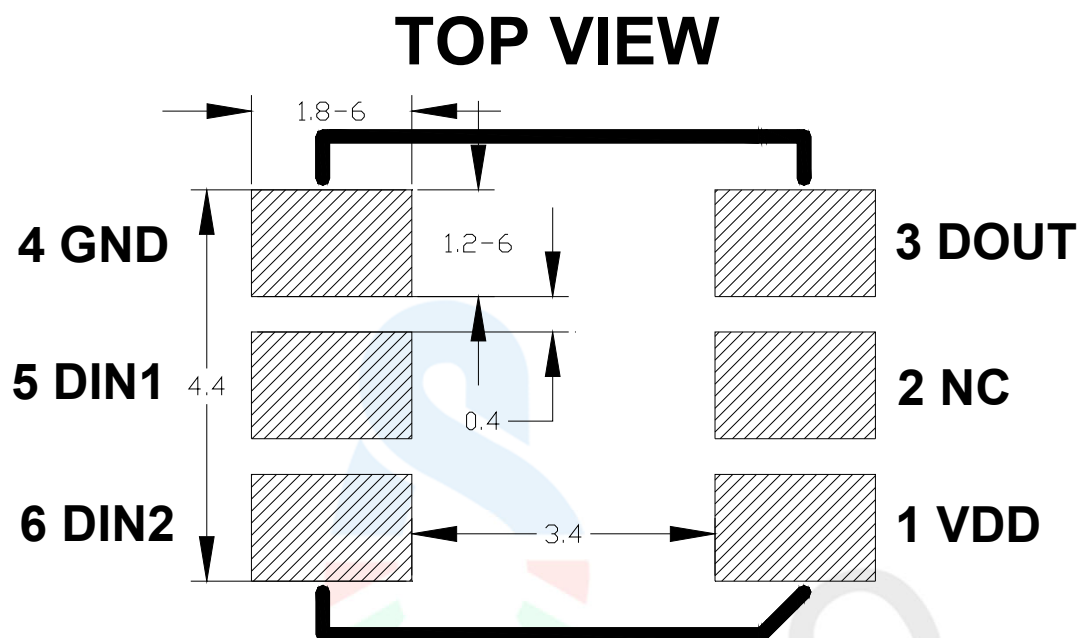

7.IC极限参数 IC limit parameter : (Ta=25℃)

参数 Parameter	符号 Symbol	范围 Range	单位 Unit
逻辑电源电压 Working voltage	V_{DD}	+10.8 ~ +14	V
工作温度 Operation temperature	T_{opt}	-40 ~ +85	℃
储存温度 Storage temperature	T_{stg}	-40 ~ +85	℃
ESD耐压 (人体模式) ESD withstand voltage (human mode)	V_{ESD}	2K	V

8. GRB LED 光电参数 Optoelectronic parameters :

颜色 Colour	SK6813HV-09-6P-003 9mA	
	波长 (nm) Wavelength (nm)	亮度 (mcd) Brightness (mcd)
红色 (RED)	615-625	160-320
绿色 (GREEN)	515-525	580-1050
蓝色 (BLUE)	455-465	100-200

注：亮度误差±10%，波长误差±1.0nm;

Note:Luminous Intensity: ±10%Iv, Dominant Wavelength: ±1.0nm.

9. IC电气参数 IC electrical parameters : (TA=25℃)

参数 Parameter	符号 Symbol	最小 Minimum	典型 Typical	最大 Maximum	单位 Unit	测试条件 Test conditions
工作电压 Chip input voltage	V _{DD}	10.8	12	14.0	V	---
信号输入翻转阈值 Signal input flip threshold	V _{IH}	4.0	---	---	V	+VDD=5.0V
	V _{IL}	---	---	1.0	V	
G/R/B输出驱动电流 G/R/B output drive current	I _{DOUT}	8.0	9.0	11.0	mA	V _{DS} =1V
PWM频率 PWM frequency	F _{PWM}	---	8.0	---	KHz	---
静态功耗 Static power consumption	I _{DD}	---	2.0	---	mA	---
数据传输速率 Transfer rate	F _{DIN}	---	800	---	Kbps	

10. 建议数据传输时间 Suggested data transmission time :

时序表名称 Timeline Name	Min.	实际值 Actual value	Max.	单位 Unit
T 码元周期 Symbol period	1.20	--	--	μs
T0H 0码, 高电平时间 0 code, high-level time	0.20	0.25	0.40	μs
T0L 0码, 低电平时间 0 code, low-level time	0.80	--	--	μs
T1H 1码, 高电平时间 1 code, high-level time	0.65	0.75	1.00	μs
T1L 1码, 低电平时间 1 code, low-level time	0.20	--	--	μs
Reset Reset码, 低电平时间 Reset code, low-level time	>200	--	--	μs

1. 协议采用单极性归零码, 每个码元必须有低电平, 本协议的每个码元起始为高电平, 高电平时间宽度决定“0”码或“1”码。

The protocol adopts unipolar zeroing code, and each symbol must have a low level. Each symbol in this protocol starts with a high level, and the duration of the high level determines the "0" or "1" code.


2. 书写程序时, 码元周期最低要求为1.2μs。

When writing a program, the minimum required code period is 1.2 μs.

3. “0”码、“1”码的高电平时间需按照上表的规定范围, “0”码、“1”码的低电平时间要求小于20μs。

The high-level time of "0" and "1" codes should be within the specified range in the table above, and the low-level time of "0" and "1" codes should be less than 20 μs.

11. 数据传输方式 Data transmission method : (Ta=25℃)

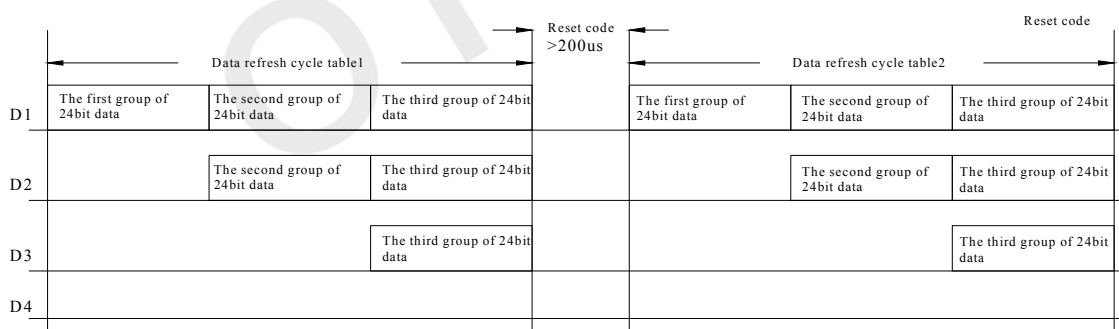


注Note : 其中D1为MCU端发送的数据, D2、D3、D4为级联电路自动整形转发的数据。


Among them, D1 is the data sent by the MCU end, and D2, D3, and D4 are the data automatically shaped and forwarded by the cascaded circuit.

12.时序波形图 Time series waveform diagram : ($T_a=25^{\circ}\text{C}$)

输入码型 Input code type :

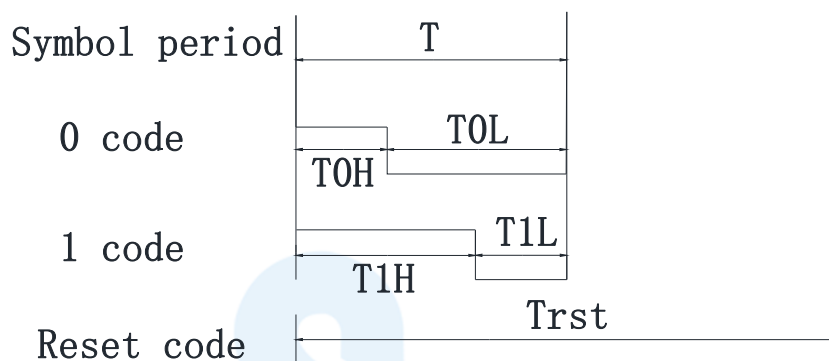

连接方式 Connection method :

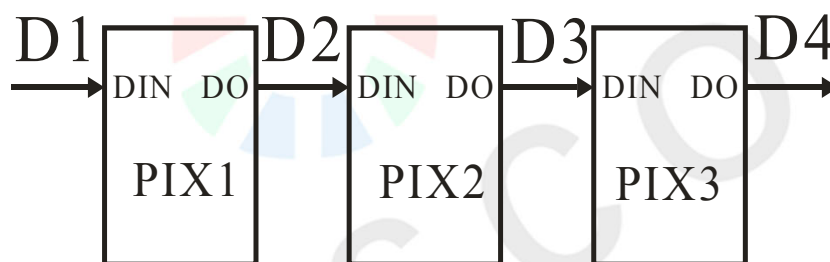

13. 24bit数据结构 24 bit data structure : ($T_a=25^{\circ}\text{C}$)




注Note：高位先发，按照RGB的顺序发送数据(R7 → R6 →.....B0)


High bit first send, send data in RGB order (R7 → R6 →.... B0)

15. 光电特性 Photoelectric characteristic :


焊盘温度与光通量输出的相对关系
 The relative relationship between pad temperature and luminous flux output

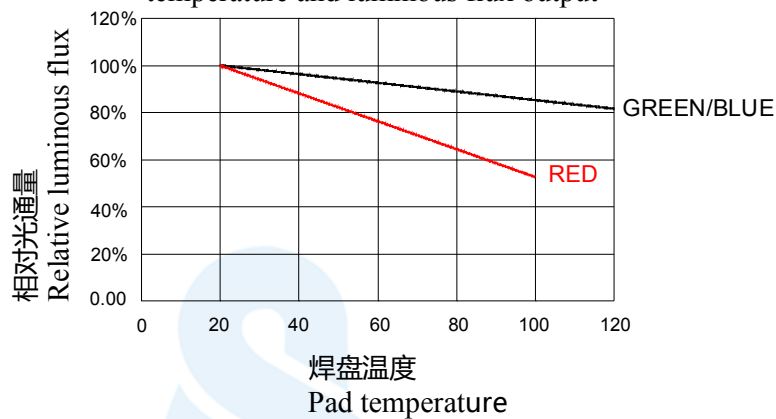


波长特性
 Wavelength characteristics

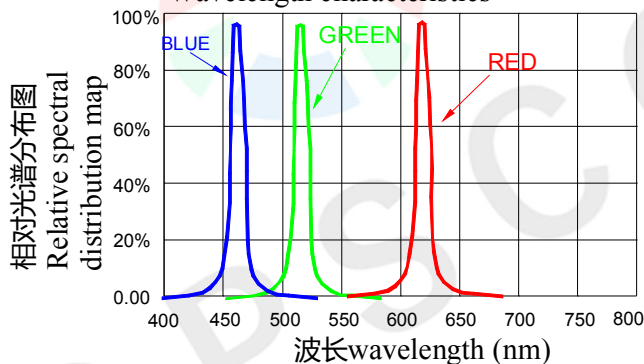

典型的辐射方向图 120°
 Typical radiation pattern 120°

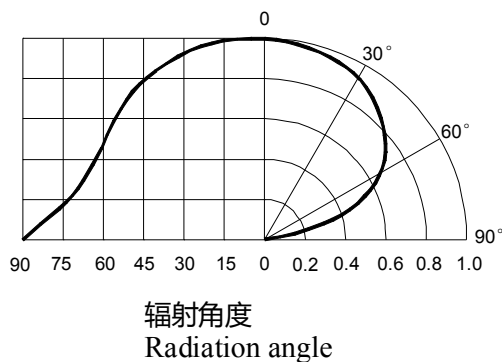

16. 包装标准 Packaging standards :

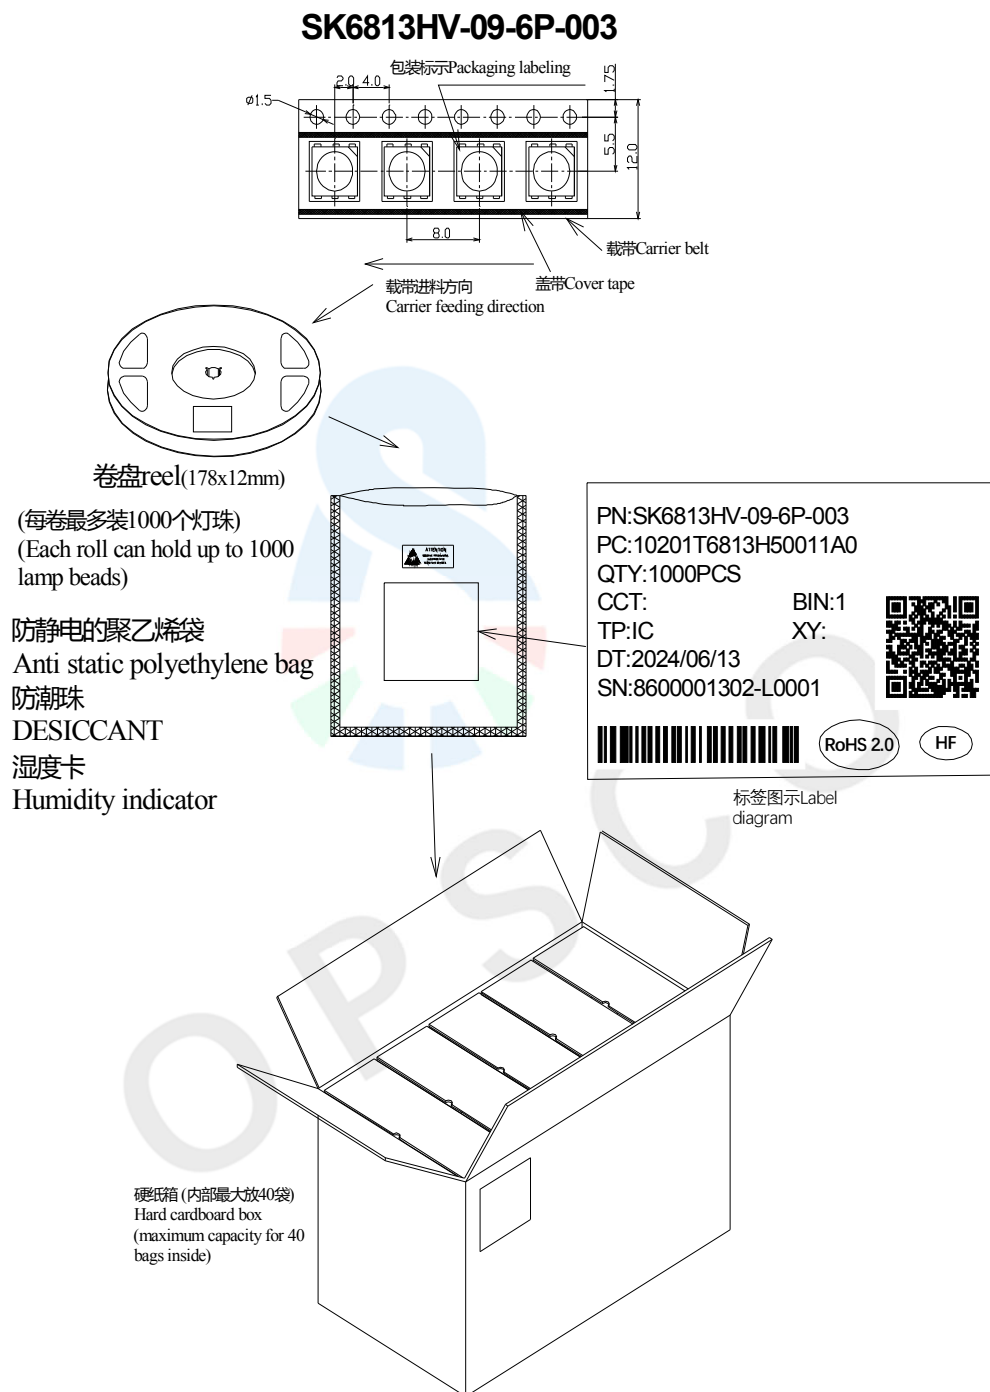

表面贴装LED采用卷盘包装，LED在用普通或防静电袋包装后再装在纸箱中。纸箱用于保护运输途中LED不受机械冲击，纸箱不防水，因此请注意防潮防水。

Surface mounted LEDs are packaged in rolls, and the LEDs are packaged in regular or anti-static bags before being packed in cardboard boxes. The cardboard box is used to protect the LED from mechanical impact during transportation. The cardboard box is not waterproof, so please pay attention to moisture-proof and waterproof.

17. 可靠性测试 Reliability testing:

序号 serial number	实验项目 Pilot projects	实验条件 Experimental condition	参考标准 Reference standards	判断 Determine
1	冷热冲击 Thermal Shock	$100 \pm 5^{\circ}\text{C} \sim -40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 15min~15min 100cycles	MIL-STD-202G	0/22
2	高温储藏 High temperature storage	$T_a = +100^{\circ}\text{C}$ 1000hrs	JEITA ED-4701 200 201	0/22
3	低温储藏 Low temperature storage	$T_a = -40^{\circ}\text{C}$ 1000hrs	JEITA ED-4701 200 202	0/22
4	高温高湿储藏 High temperature and high humidity storage	$T_a = 60^{\circ}\text{C}$ RH=90% 1000hrs	JEITA ED-4701 100 103	0/22
5	温度循环 Temperature cycling	$-40^{\circ}\text{C} \sim 25^{\circ}\text{C} \sim 100^{\circ}\text{C} \sim 25^{\circ}\text{C}$ 30min~5min~30min~5min 100 cycles	JEITA ED-4701 100 105	0/22
6	耐焊接热 Resistance to Soldering Heat	$T_{\text{sld}} = 260^{\circ}\text{C}$, 10sec. 2 times	JEITA ED-4701 300 301	0/22
7	常温寿命测试 Normal temperature life test	25°C , IF: Typical current , 1000hrs	JESD22-A 108D	0/22

失效判定标准 Failure criteria:

项目 Project	符号 Symbol	测试条件 Test conditions	判断标准 Judgment criteria	
			最小值 Minimum value	最大值 Maximum value
发光强度 Intensity	IV	DC=5V,规格典型电流 DC=5V, Typical current specification	初始数据X0.7 Initial data X0.7	---
耐焊接热 Resistance to Soldering Heat	---	DC=5V,规格典型电流 DC=5V, Typical current specification	无死灯或明显损坏 No dead lights or obvious damage	

修订记录 Revision record

日期 Date	Rev. No.	修改/改变的原因 Reason for modification/change	签名 Signature
2023-08-17	01	首次发行 First issue	Liu Feng
2024-06-13	B/0	1.更改规格书版式 1.Change the layout of the specification sheet 2.升级IC 电气参数 2.Upgrade IC electrical parameters	Tony Wu