
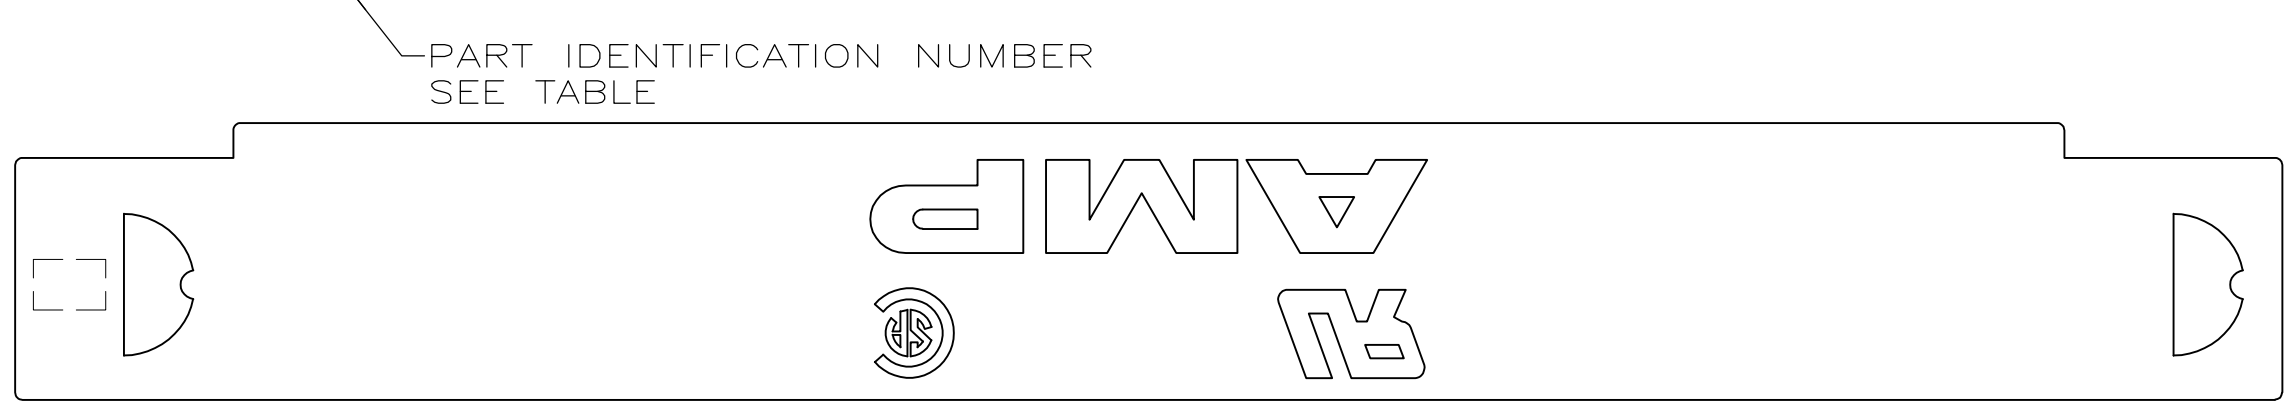
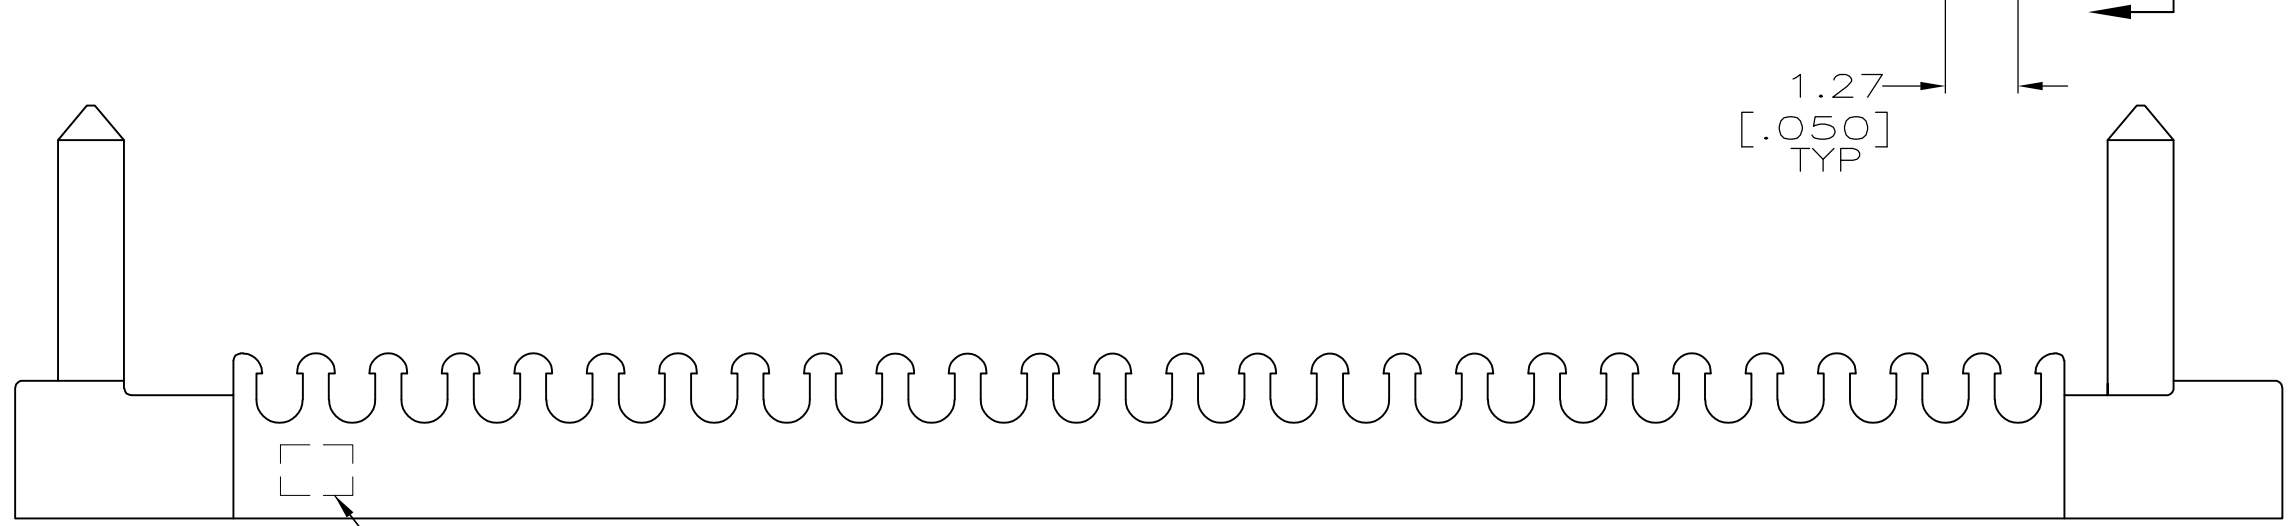


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
		E		REVISED PER ECO-14-009463	02JUL2014	AP	SB

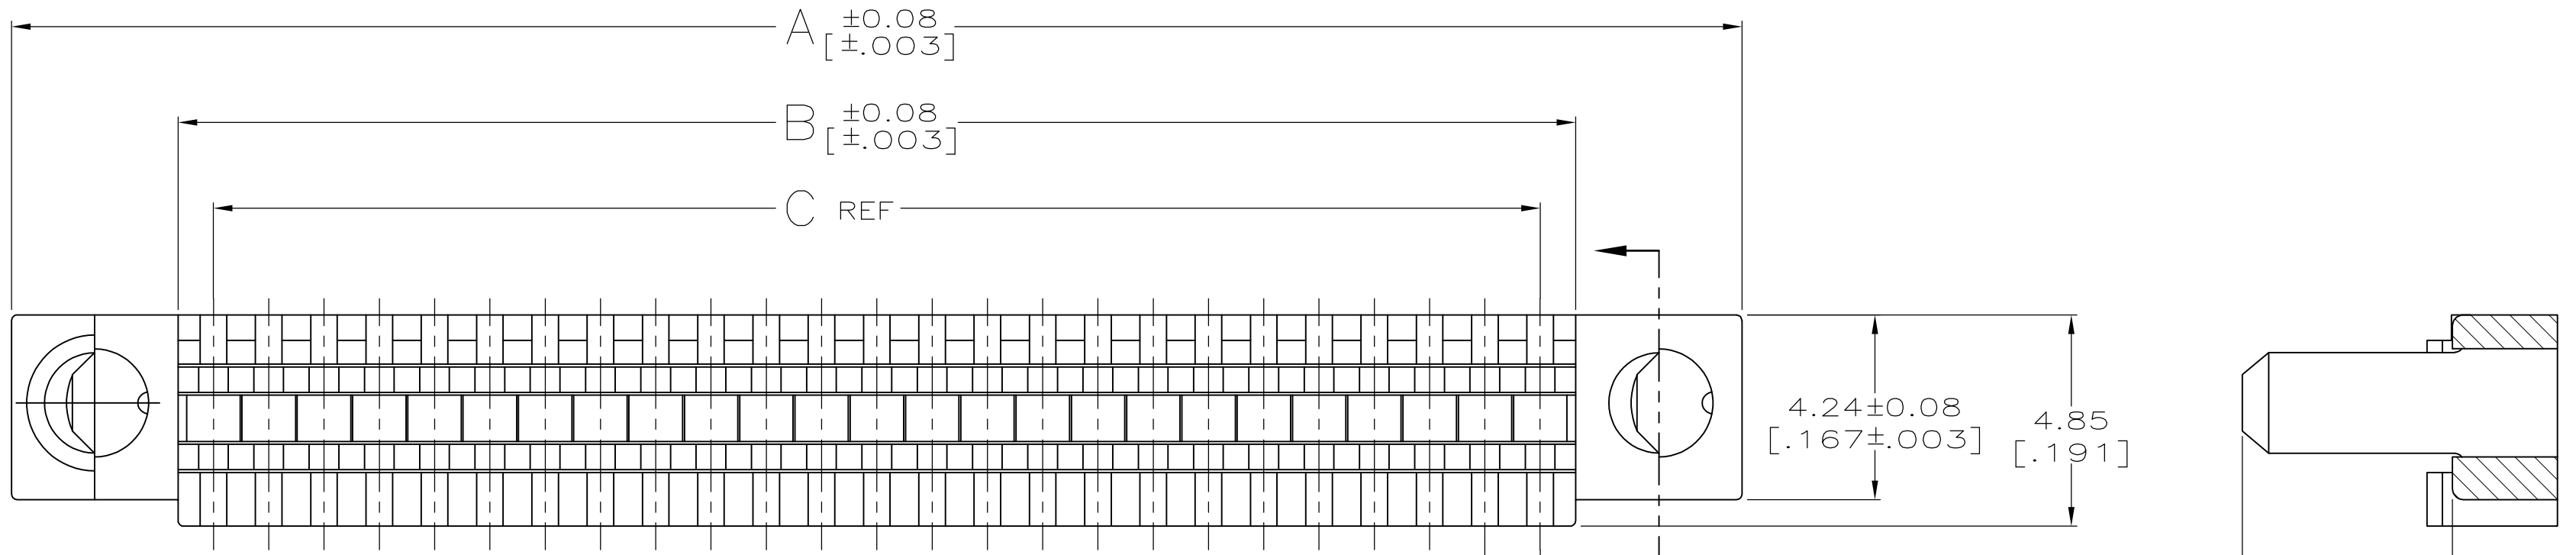

- ① NYLON OR POLYESTER, UL 94V-0 RATED, COLOR: SEE TABLE.
- ② RECOMMENDED WIRE: 28 AWG OR 30 AWG SOLID OR 7 STRAND. SEE TABLE FOR INSULATION DIA. WIRE MUST BE APPROVED BY AMP INC.
- ③ TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.
- ④ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	0.74-0.79	[.029-.031]	GRAY	2	62.23	[2.450]	63.86	[2.514]	71.50	[2.815]	100	1-750877-9	
	0.74-0.79	[.029-.031]	GRAY	2	41.91	[1.650]	43.54	[1.714]	51.18	[2.015]	68	1-750877-7	
	0.74-0.79	[.029-.031]	GRAY	2	30.48	[1.200]	32.11	[1.264]	39.75	[1.565]	50	1-750877-5	
④ OBSOLETE	0.74-0.79	[.029-.031]	GRAY	2	24.13	[.950]	25.76	[1.014]	33.40	[1.315]	40	1-750877-4	
	0.74-0.79	[.029-.031]	GRAY	2	15.24	[.600]	16.87	[.664]	24.51	[.965]	26	1-750877-2	
④ OBSOLETE	0.81-0.91	[.032-.036]	BLACK	1	62.23	[2.450]	63.86	[2.514]	71.50	[2.815]	100	750877-9	
OBSOLETE	0.81-0.91	[.032-.036]	BLACK	1	49.53	[1.950]	51.156	[2.014]	58.801	[2.315]	80	750877-8	
	0.81-0.91	[.032-.036]	BLACK	1	41.91	[1.650]	43.54	[1.714]	51.18	[2.015]	68	750877-7	
	0.81-0.91	[.032-.036]	BLACK	1	30.48	[1.200]	32.11	[1.264]	39.75	[1.565]	50	750877-5	
④ OBSOLETE	0.81-0.91	[.032-.036]	BLACK	1	24.13	[.950]	25.76	[1.014]	33.40	[1.315]	40	750877-4	
	0.81-0.91	[.032-.036]	BLACK	1	15.24	[.600]	16.87	[.664]	24.51	[.965]	26	750877-2	
	WIRE OUTER DIA	②	COLOR	PART ID NO	C			B		A		NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	B. MCMASTER	14JUNE04	 TE Connectivity
CHK	S. SHUEY	14JUNE04	
APVD	M. WALMSLEY	14JUNE04	
NAME	COVER, TERMINATING, DISCRETE WIRE, AMPLIMITE		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC
單位: 英	一般公差		製品規格
mm[INCHES]	0 PLC	± -	APPLICATION SPEC
	1 PLC	± -	取付適用規格
	2 PLC	± 0.13 [0.005]	
	3 PLC	± -	
	4 PLC	± -	
	ANGLES	± -	
MATERIAL	FINISH		WEIGHT
材料	仕上		-
			CUSTOMER DRAWING

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 750877 RESTRICTED TO: -

SCALE: 8:1 SHEET: 1 OF 1 REV: E