


## CD4543B BCD-to-7-Segment Latch/Decoder/Driver for Liquid Crystals

### Features

- Wide supply voltage:3.0V to 18V
- range High noise immunity:0.45 V<sub>DD</sub> (typ.)
- Low power TTL Compatibility:Fan out of 2 driving 74L or 1 driving 74LS
- Low power dissipation:50 nA/package (typ.) at V<sub>DD</sub> =5.0V
- Latch storage
- Blanking input
- Blank for all illegal inputs
- Direct-drive LCD, LED and VF displays
- Pin-for-pin replacement for CD4056B (with pin 7 tied to V<sub>ss</sub>)
- Pin-for-pin replacement for Motorola MC14543B

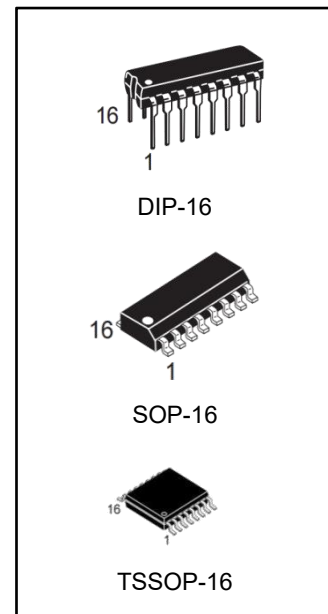

### Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
CD4543BE/ CD4543BN	DIP-16	CD4543B	TUBE	1000pcs/box
CD4543BM/TR	SOP-16	CD4543B	REEL	2500pcs/reel
CD4543BMT/TR	TSSOP-16	CD4543B	REEL	2500pcs/reel

## General Description


The CD4543BM is a monolithic CMOS BCD-to-7-segment latch/decoder/driver for use with liquid crystal and other types of displays. The circuit provides the functions of a 4-bit storage latch and an 8421 BCD-to-7-segment decoder and driver. The device has the capability to invert the logic levels of the output combination. The phase(Ph), blanking (BI) and latch disable (LD) inputs are used to reverse the truth table phase, blank the display, and store a BCD code, respectively. For liquid crystal(LC) readouts, a square wave is applied to the Ph input of the circuit and the electrically common backplane of the display, and the outputs of the circuit are connected directly to the segments of the LC readout. For other types of readouts, such as light emitting diode (LED), incandescent, gas discharge, and fluorescent readouts, connection diagrams are given on this data sheet.

All inputs are protected against static discharge by diode clamps to  $V_{DD}$  and  $V_{SS}$ .

## Applications

- Instrument (e.g., counter, DVM, etc.) display driver
- Computer/calculator display driver
- Cockpit display driver
- Various clock, watch, and timer users

## Connection Diagram and

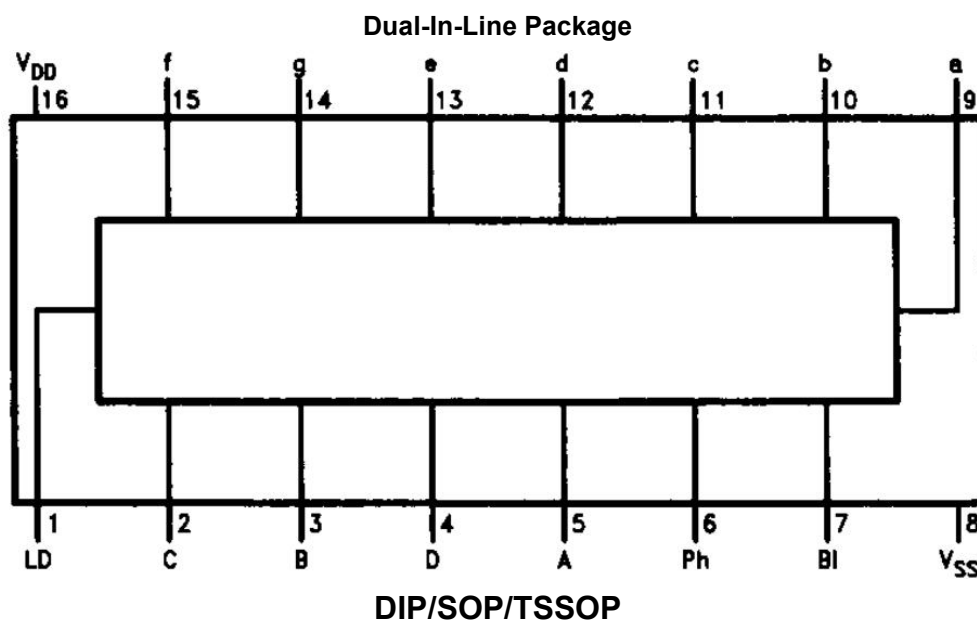

**Truth Table**

inputs				Outputs							Display
LD	BI	Ph*	D C B A	a b c d e f g							
X	1	0	X X X X	0 0 0 0 0 0 0	Blank						
1	0	0	0 0 0 0	1 1 1 1 1 1 0	0						
1	0	0	0 0 0 1	0 1 1 0 0 0 0	1						
1	0	0	0 0 1 0	1 1 0 1 1 0 1	2						
1	0	0	0 0 1 1	1 1 1 1 0 0 1	3						
1	0	0	0 1 0 0	0 1 1 0 0 1 1	4						
1	0	0	0 1 0 1	1 0 1 1 0 1 1	5						
1	0	0	0 1 1 0	1 0 1 1 1 1 1	6						
1	0	0	0 1 1 1	1 1 1 0 0 0 0	7						
1	0	0	1 0 0 0	1 1 1 1 1 1 1	8						
1	0	0	1 0 0 1	1 1 1 1 0 1 1	9						
1	0	0	1 0 1 0	0 0 0 0 0 0 0	Blank						
1	0	0	1 0 1 1	0 0 0 0 0 0 0	Blank						
1	0	0	1 1 0 0	0 0 0 0 0 0 0	Blank						
1	0	0	1 1 0 1	0 0 0 0 0 0 0	Blank						
1	0	0	1 1 1 0	0 0 0 0 0 0 0	Blank						
1	0	0	1 1 1 1	0 0 0 0 0 0 0	Blank						
0	0	0	X X X X	**	**						
†	†	1	†	Inverse of Output Combinations Above	Display As Above						

X = Don't care

† = Above combinations

\* =For liquid crystal readouts, apply a square wave to Ph.

For common cathode LED readouts, select Ph = 0.

For common anode LED readouts, select Ph = 1.

\*\* =Depends upon the BCD code previously applied when LD = 1.

**Display Format**


## Absolute Maximum Ratings (Notes 1&2)

Condition		Min	Max	UNITS
DC Supply Voltage( $V_{DD}$ )		-0.5	+18	$V_{DC}$
Input Voltage ( $V_{IN}$ )		-0.5	$V_{DD}+0.5$	$V_{DC}$
Storage Temp. Range( $T_s$ )		-65	+150	$^{\circ}C$
Power Dissipation ( $P_D$ )	Dual-In-Line	700		mW
	Small Outline	500		mW
Lead Temperature( $T_L$ ) (Soldering, 10 seconds)		245		$^{\circ}C$

Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

## Recommended Operating Conditions (Note 2)

Condition		Min	Max	UNITS
DC Supply Voltage( $V_{DD}$ )		3	15	$V_{DC}$
Input Voltage ( $V_{IN}$ )		0	$V_{DD}$	$V_{DC}$
Operating Temperature Range ( $T_A$ )		-40	+85	$^{\circ}C$

## DC Electrical Characteristics (Note 2)

Symbol	Parameter	Conditions	-40 $^{\circ}C$		+25 $^{\circ}C$			+85 $^{\circ}C$		Units
			Min	Max	Min	Typ	Max	Min	Max	
$I_{DD}$	Quiescent Device Current	$V_{DD}=5V, V_{IN}=V_{DD}$ or $V_{SS}$	-	20	-	-	20	-	150	$\mu A$
		$V_{DD}=10V, V_{IN}=V_{DD}$ or $V_{SS}$	-	40	-	-	40	-	300	
		$V_{DD}=15V, V_{IN}=V_{DD}$ or $V_{SS}$	-	80	-	-	80	-	600	
$V_{OL}$	Low Level Output Voltage	$V_{DD}=5V$	-	0.05	-	0	0.05	-	0.05	V
		$V_{DD}=10V, I_{OL}<1\mu A$	-	0.05	-	0	0.05	-	0.05	
		$V_{DD}=15V$	-	0.05	-	0	0.05	-	0.05	
$V_{OH}$	High Level Output Voltage	$V_{DD}=5V$	4.95	-	4.95	5	-	4.95	-	V
		$V_{DD}=10V, I_{OL}<1\mu A$	9.95	-	9.95	10	-	9.95	-	
		$V_{DD}=15V$	14.95	-	14.95	15	-	14.59	-	
$V_{IL}$	Low Level Input Voltage	$V_{DD}=5V, V_o=0.5V$ or $4.5V$	-	1.5	-	-	1.5	-	1.5	V
		$V_{DD}=10V, V_o=1V$ or $9V$	-	3.0	-	-	3.0	-	3.0	
		$V_{DD}=15V, V_o=1.5V$ or $13.5V$	-	4.0	-	-	4.0	-	4.0	
$V_{IH}$	High Level Input Voltage	$V_{DD}=5V, V_o=0.5V$ or $4.5V$	3.5	-	3.5	-	-	3.5	-	V
		$V_{DD}=10V, V_o=1V$ or $9V$	7.0	-	7.0	-	-	7.0	-	
		$V_{DD}=15V, V_o=1.5V$ or $13.5V$	11.0	-	11.0	-	-	11.0	-	
$I_{OL}$	Low Level Output Current (Note 3)	$V_{DD}=5V, V_o=0.4V$	0.52	-	0.51	-	-	0.36	-	mA
		$V_{DD}=10V, V_o=0.5V$	1.3	-	1.3	-	-	0.9	-	
		$V_{DD}=15V, V_o=1.5V$	3.6	-	3.4	-	-	2.4	-	
$I_{OH}$	High Level Output Current (Note 3)	$V_{DD}=5V, V_o=4.6V$	-0.52	-	-0.44	-	-	-0.36	-	mA
		$V_{DD}=10V, V_o=9.5V$	-1.3	-	-1.1	-	-	-0.9	-	
		$V_{DD}=15V, V_o=13.5V$	-3.6	-	-3.0	-	-	-2.4	-	
$I_{IN}$	Input Current	$V_{DD}=15V, V_{IN}=0V$	-	-0.3	-	$-10^{-5}$	-0.3	-	-1.0	$\mu A$
		$V_{DD}=15V, V_{IN}=15V$	-	0.3	-	$10^{-5}$	0.3	-	1.0	

**AC Electrical Characteristics**\* $T_A=25^{\circ}C, C_L= 50\text{ pF}, V_{SS} = 0$ , unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$t_r$	Output Rise Time	VDD=5V VDD =10V VDD=15V	-	100 50 40	200 100 80	ns
$t_f$	Output Fall Time	VDD=5V VDo=10V VDD-15V	-	100 50 40	200 100 80	ns
$t_{PLH}$	Turn-ON Propagation Delay Time	VDD =5V VDD = 10V VDD-15V	-	450 170 110	1100 440 330	ns
$t_{PHL}$	Turn-OFF Propagation Delay Time	VDD =5V VDD = 10V VDD-15V	-	500 180 120	1100 440 330	ns
$t_{SET-UP}$	Set-Up Time	VDD =5V VDD = 10V VDD-15V	-	-5 -2 0	80 30 20	ns
$t_{HOLD}$	Hold Time	VDD =5V VDD = 10V VDD-15V	-	30 20 15	120 45 30	ns
$PW_{LD}$	Latch Disable Pulse Width	VDD =5V VDD = 10V VDD-15V	-	50 30 20	250 100 80	ns
$C_{IN}$	Input Capacitance	Per input	-	5	7.5	pF
$C_{PD}$	Power Dissipation Capacitance	See Cpo Measurement Waveforms (Note 4)	-	300	-	pF

\* AC Parameters are guaranteed by DC correlated testing.


**Note 1:** "Absolute Maximum Ratings"are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions"and Electrical Characteristics"provide conditions for actual device operation.

**Note 2:**  $V_{SS} = 0V$  unless otherwise specified.



**Note 3:**  $I_{OH}$  and  $I_{OL}$  are tested one output at a time.

**Note 4:**  $C_{PD}$  determines the no load AC power consumption of a CMOS device. For a complete explanation, see "MM54C/74C Family Characteristics"Application Note AN-90.


## Logic Diagram

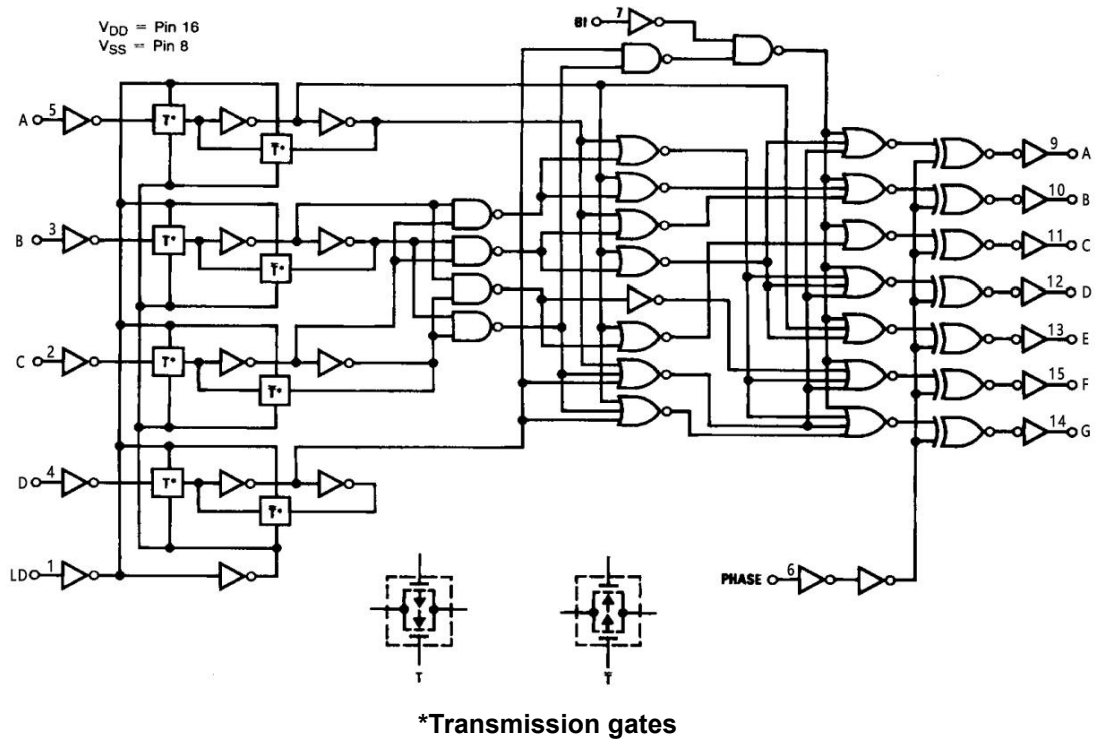

## Typical Applications

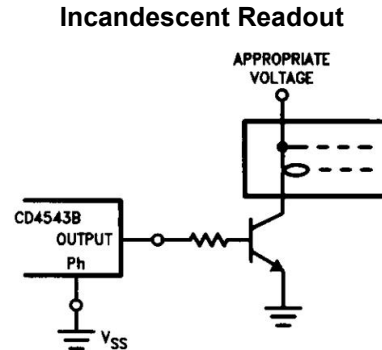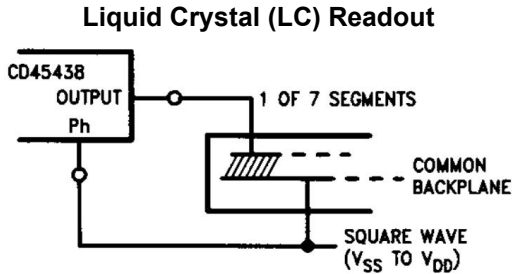


### Light Emitting Diode (LED) Readout

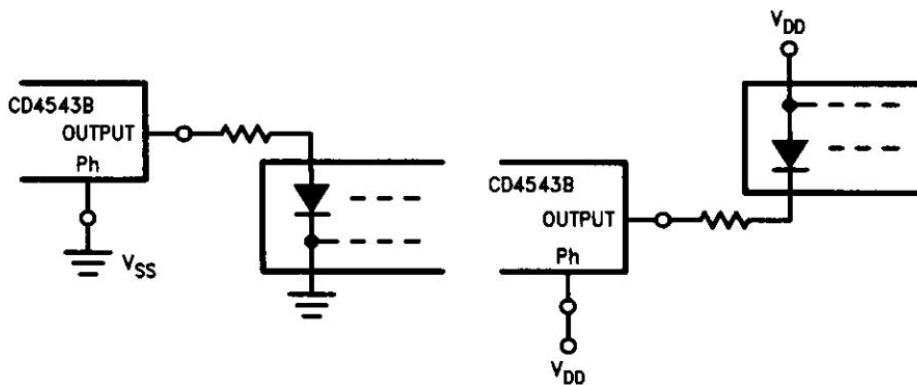


**Note:** Bipolar transistors may be added for gain (for  $V_{DD} \leq 10V$  or  $I_{OUT} \geq 10\text{ mA}$ )

Typical Applications(Continued)

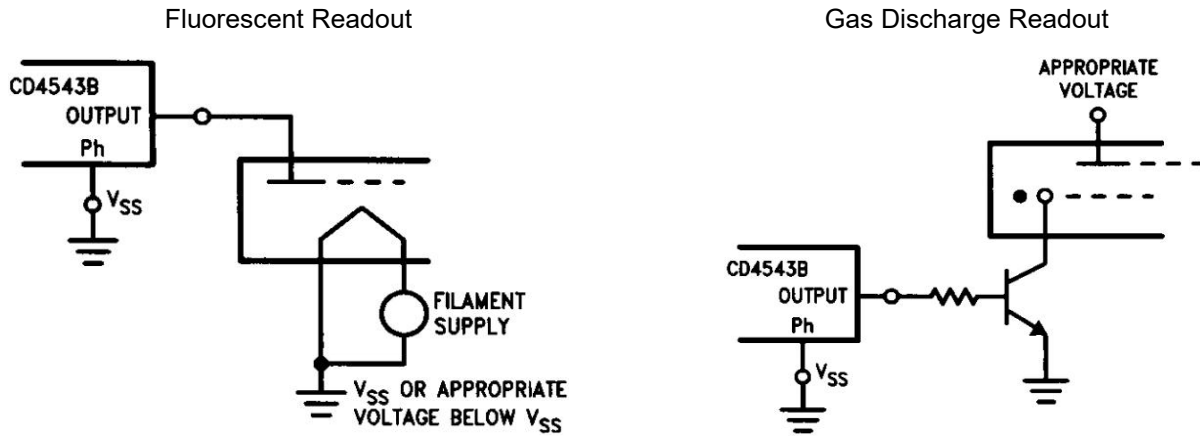


3½-Digit DVM with LCD Display

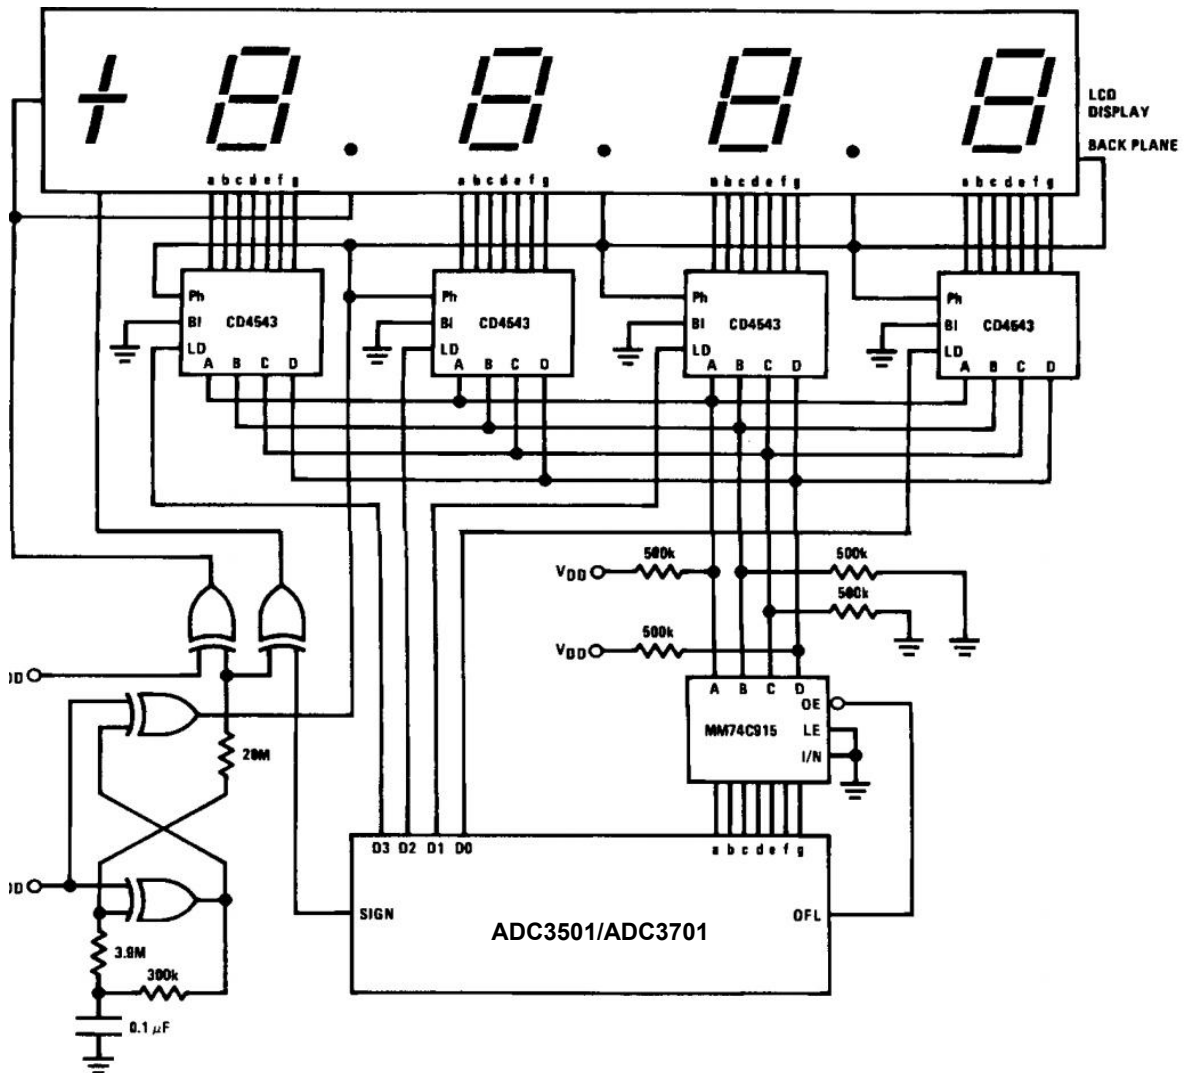

Display 9.999 when overflowed. All digits can also be blanked at overflow by typing OFL to BI on the CD4543's.


## Switching Time Waveforms

### CPO MEASUREMENT WAVEFORMS

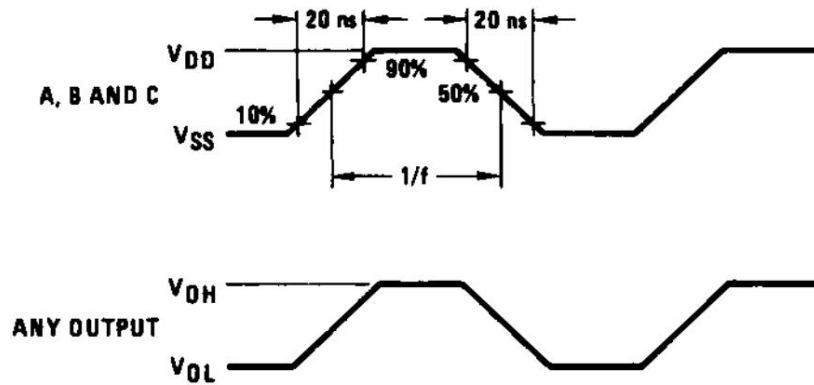


Inputs Bland Ph low, and inputs D and LD high.  $f$  in respect to a system clock.  
All outputs connected to respective C loads.


## Dynamic Signal Waveforms

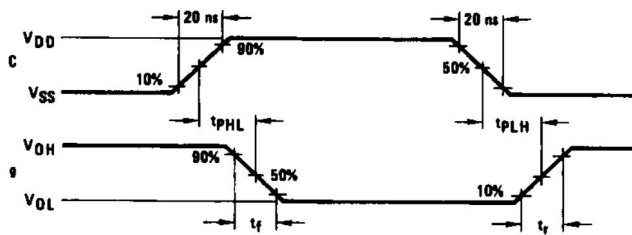

Inputs D, Ph and BI Low, and Inputs A, B and LD High

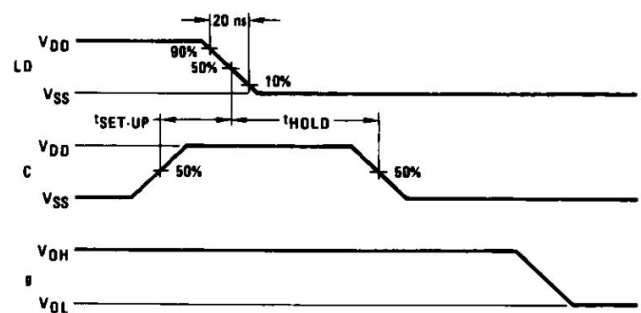

(Inputs D, Ph and BI Low, and inputs A and B Hi

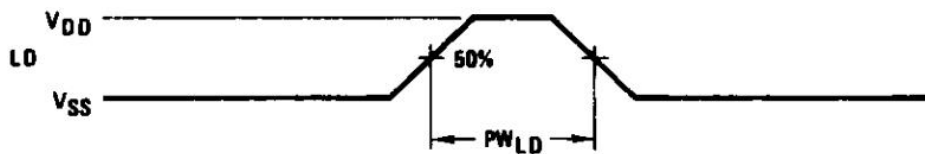


Data DCBA Strobe into Latches




**Physical Dimensions**

SOP-16

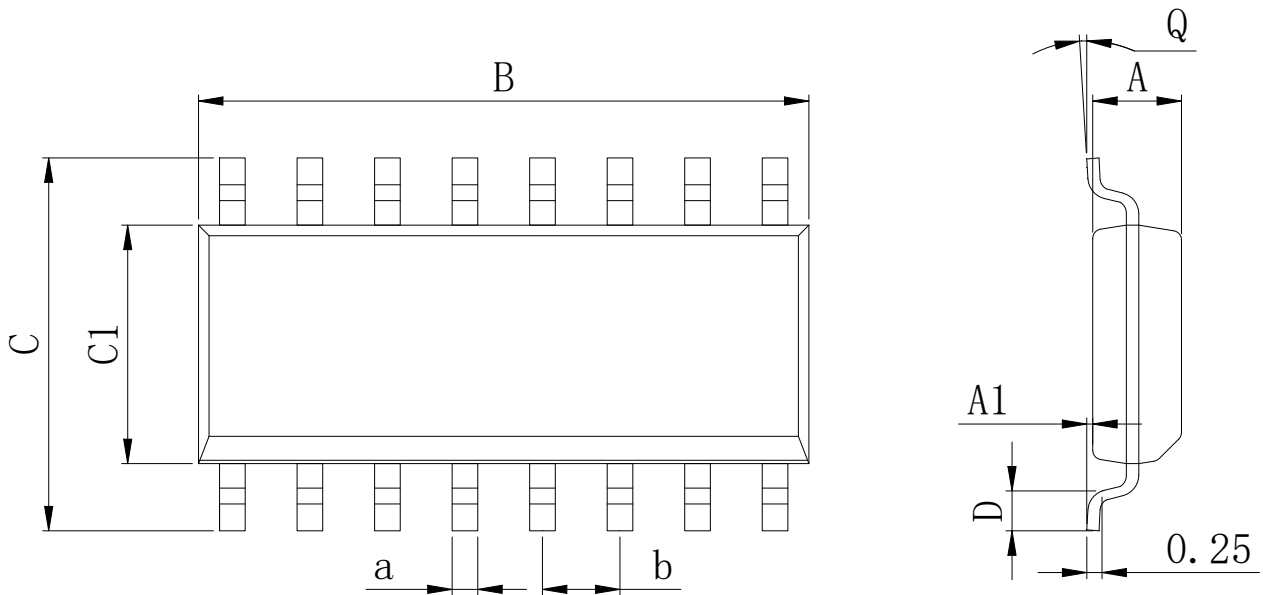
**Dimensions In Millimeters(SOP-16)**

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	


DIP-16

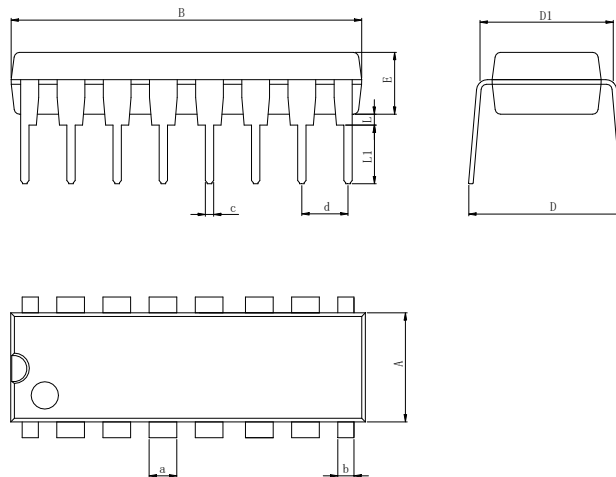
**Dimensions In Millimeters(DIP-16)**

Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	

**Physical Dimensions**

TSSOP-16

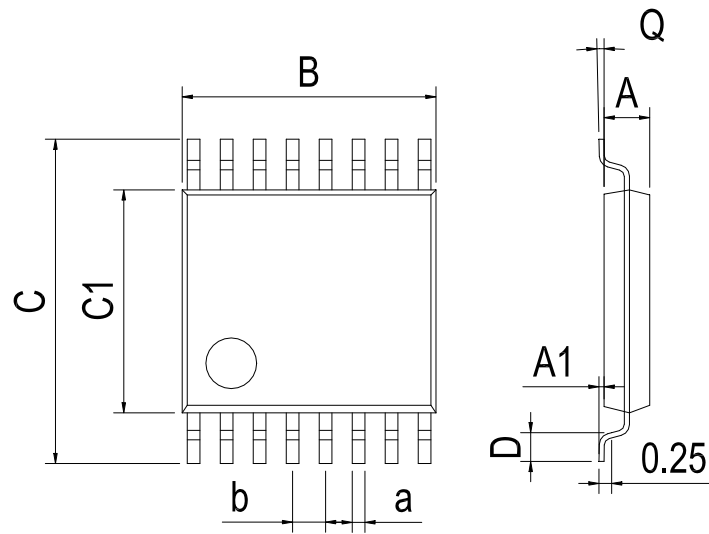

Dimensions In Millimeters(TSSOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

## Revision History

DATE	REVISION	PAGE
2018-8-9	New	1-13
2023-11-15	Modify the package dimension diagram TSSOP-16、 Update encapsulation type、 Update Lead Temperature、 Updated DIP-16 dimension、 Add annotation for Maximum Ratings、 Update DIP Package New Model	1、 4、 9、 12

**IMPORTANT STATEMENT:**

Huaguan Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Huaguan Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Huaguan Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: Select the appropriate Huaguan Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Huaguan Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Huaguan Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Huaguan Semiconductor, and the user shall not claim any compensation liability against Huaguan Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Huaguan Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Huaguan Semiconductor. Not all parameters of each device need to be tested.

The documentation of Huaguan Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Huaguan Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Huaguan Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Huaguan Semiconductor accepts no liability for any loss or damage caused by infringement.