



灵星芯微 勇芯经营

# SN74LVC1G08 (LX)

## Single 2-input And Gate

### Product Specification

#### Specification Revision History:

Version	Date	Description
2021-07-A1	2021-07	New
2023-04-B1	2023-04	Update the template
2023-10-B2	2023-10	Additional package



灵星芯微 芯片经营

# Contents

<b>1、 General Description.....</b>	<b>3</b>
<b>2、 Block Diagram And Pin Description .....</b>	<b>4</b>
2.1、 Block Diagram .....	4
2.2、 Pin Configurations .....	5
2.3、 Pin Description.....	5
2.4、 Function Table .....	6
<b>3、 Electrical Parameter .....</b>	<b>6</b>
3.1、 Absolute Maximum Ratings.....	6
3.2、 Recommended Operating Conditions .....	6
3.3、 Electrical Characteristics.....	7
3.3.1、 DC Characteristics 1 .....	7
3.3.2、 DC Characteristics 2.....	8
3.3.3、 AC Characteristics 1 .....	9
3.3.4、 AC Characteristics 2.....	9
<b>4、 Testing Circuit .....</b>	<b>10</b>
4.1、 AC Testing Circuit.....	10
4.2、 AC Testing Waveforms.....	10
4.3、 Measurement Points .....	10
4.4、 Test Data .....	10
<b>5、 Package Information .....</b>	<b>11</b>
5.1、 SOT23-5 .....	11
5.2、 SOT353.....	12
5.3、 XSON6(1*1*0.45-0.35) .....	13
<b>6、 Statements .....</b>	<b>15</b>
6.1、 The name and content of Hazardous substances or Elements in the product .....	15



灵星芯微 专注经营

## 1、General Description

The SN74LVC1G08 provides one 2-input AND function.

Inputs can be driven from either 3.3V or 5V devices. This feature allows the use of these devices as translators in mixed 3.3V and 5V applications.

### Features:

- Wide supply voltage range from 1.65V to 5.5V
- $\pm 24\text{mA}$  output drive ( $V_{DD}=3.0\text{V}$ )
- CMOS low power consumption
- Input accepts voltages up to 5V
- Specified from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Packaging information: SOT-23-5/SOT-353/XSON6

### Ordering Information:

#### Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
SN74LVC1G08DB (LX)	SOT-23-5	AEXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.9mm×1.6mm Pin spacing:0.95mm
SN74LVC1G08DC (LX)	SOT-353	AEXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.1mm×1.3mm Pin spacing:0.65mm
SN74LVC1G08DS (LX)	XSON6	AEXX	5000 PCS/reel	25000 PCS/box	Dimensions of plastic enclosure: 1.0mm×1.0mm Pin spacing :0.35mm

Note 1: "XX" refers to variable content, meaning year and package batch serial number.

Note 2: If the physical information is inconsistent with the ordering information, please refer to the actual product.



## 2、Block Diagram And Pin Description

### 2.1、Block Diagram

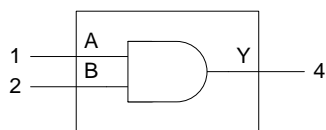


Figure 1. Logic symbol




Figure 2. IEC logic symbol


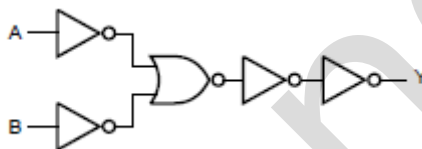


Figure 3. Logic diagram




灵星芯微 集成电路

## 2.2、Pin Configurations

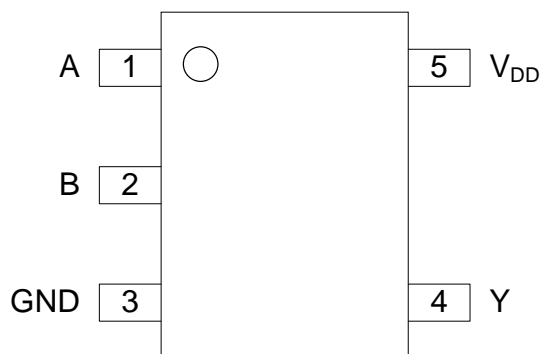

SOT23-5/SOT353

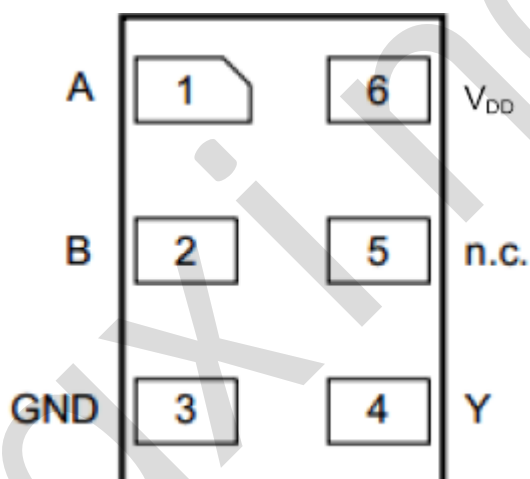

XSON6

## 2.3、Pin Description

Pin No. SOT23-5/SO T353	Pin No. XSON6	Pin Name	Description
1	1	A	data input
2	2	B	data input
3	3	GND	ground (0V)
4	4	Y	data output
-	5	n.c.	not connected
5	6	V <sub>DD</sub>	supply voltage



## 2.4、Function Table

Input		Output
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

Note: H=HIGH voltage level; L=LOW voltage level.

## 3、Electrical Parameter

### 3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	$V_{DD}$	-	-0.5	+6.5	V
input clamping current	$I_{IK}$	$V_I < 0V$	-50	-	mA
input voltage	$V_I$	-	-0.5	+6.5	V
output clamping current	$I_{OK}$	$V_O > V_{DD}$ or $V_O < 0V$	-	$\pm 50$	mA
output voltage	$V_O$	Active mode	-0.5	$V_{DD}+0.5$	V
		Power-down mode	-0.5	+6.5	V
output current	$I_O$	$V_O=0V$ to $V_{DD}$	-	$\pm 50$	mA
supply current	$I_{DD}$	-	-	100	mA
ground current	$I_{GND}$	-	-100	-	mA
storage temperature	$T_{stg}$	-	-65	+150	°C
total power dissipation	$P_{tot}$	-	-	250	mW
soldering temperature	$T_L$	10s	260		°C

### 3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	$V_{DD}$	-	1.65	-	5.5	V
input voltage	$V_I$	-	0	-	5.5	V
output voltage	$V_O$	Active mode	0	-	$V_{DD}$	V
		Power-down mode; $V_{DD}=0V$	0	-	5.5	V
ambient temperature	$T_{amb}$	-	-40	-	+125	°C



### 3.3、Electrical Characteristics

#### 3.3.1、DC Characteristics 1

( $T_{amb}=-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
HIGH-level input voltage	$V_{IH}$	$V_{DD}=1.65\text{V}$ to $1.95\text{V}$	$0.65 \times V_{DD}$	-	-	V	
		$V_{DD}=2.3\text{V}$ to $2.7\text{V}$	1.7	-	-	V	
		$V_{DD}=2.7\text{V}$ to $3.6\text{V}$	2.0	-	-	V	
		$V_{DD}=4.5\text{V}$ to $5.5\text{V}$	$0.7 \times V_{DD}$	-	-	V	
LOW-level input voltage	$V_{IL}$	$V_{DD}=1.65\text{V}$ to $1.95\text{V}$	-	-	$0.35 \times V_{DD}$	V	
		$V_{DD}=2.3\text{V}$ to $2.7\text{V}$	-	-	0.7	V	
		$V_{DD}=2.7\text{V}$ to $3.6\text{V}$	-	-	0.8	V	
		$V_{DD}=4.5\text{V}$ to $5.5\text{V}$	-	-	$0.3 \times V_{DD}$	V	
HIGH-level output voltage	$V_{OH}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O=-100\mu\text{A}; V_{DD}=1.65\text{V}$ to $5.5\text{V}$	$V_{DD}-0.1$	-	-	V
			$I_O=-4\text{mA}; V_{DD}=1.65\text{V}$	1.2	-	-	V
			$I_O=-8\text{mA}; V_{DD}=2.3\text{V}$	1.9	-	-	V
			$I_O=-12\text{mA}; V_{DD}=2.7\text{V}$	2.2	-	-	V
			$I_O=-24\text{mA}; V_{DD}=3.0\text{V}$	2.3	-	-	V
			$I_O=-32\text{mA}; V_{DD}=4.5\text{V}$	3.8	-	-	V
LOW-level output voltage	$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O=100\mu\text{A}; V_{DD}=1.65\text{V}$ to $5.5\text{V}$	-	-	0.1	V
			$I_O=4\text{mA}; V_{DD}=1.65\text{V}$	-	-	0.45	V
			$I_O=8\text{mA}; V_{DD}=2.3\text{V}$	-	-	0.3	V
			$I_O=12\text{mA}; V_{DD}=2.7\text{V}$	-	-	0.4	V
			$I_O=24\text{mA}; V_{DD}=3.0\text{V}$	-	-	0.55	V
			$I_O=32\text{mA}; V_{DD}=4.5\text{V}$	-	-	0.55	V
input leakage current	$I_I$	$V_I=5.5\text{V}$ or GND; $V_{DD}=0\text{V}$ to $5.5\text{V}$	-	-	$\pm 1$	$\mu\text{A}$	
power-off leakage current	$I_{OFF}$	$V_I$ or $V_O=5.5\text{V}; V_{DD}=0\text{V}$	-	-	$\pm 2$	$\mu\text{A}$	
supply current	$I_{DD}$	$V_I=5.5\text{V}$ or GND; $I_O=0\text{A}; V_{DD}=1.65\text{V}$ to $5.5\text{V}$	-	-	4	$\mu\text{A}$	
additional supply current	$\Delta I_{DD}$	per pin; $V_I=V_{DD}-0.6\text{V}; I_O=0\text{A}; V_{DD}=2.3\text{V}$ to $5.5\text{V}$	-	-	500	$\mu\text{A}$	
input capacitance	$C_I$	$V_{DD}=3.3\text{V}; V_I=\text{GND}$ to $V_{DD}$	-	5	-	pF	

Note: All typical values are measured at  $V_{DD}=3.3\text{V}$  and  $T_{amb}=25^{\circ}\text{C}$ .



### 3.3.2、DC Characteristics 2

( $T_{amb} = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
HIGH-level input voltage	$V_{IH}$	$V_{DD}=1.65\text{V}$ to $1.95\text{V}$	$0.65 \times V_{DD}$	-	-	V	
		$V_{DD}=2.3\text{V}$ to $2.7\text{V}$	1.7	-	-	V	
		$V_{DD}=2.7\text{V}$ to $3.6\text{V}$	2.0	-	-	V	
		$V_{DD}=4.5\text{V}$ to $5.5\text{V}$	$0.7 \times V_{DD}$	-	-	V	
LOW-level input voltage	$V_{IL}$	$V_{DD}=1.65\text{V}$ to $1.95\text{V}$	-	-	$0.35 \times V_{DD}$	V	
		$V_{DD}=2.3\text{V}$ to $2.7\text{V}$	-	-	0.7	V	
		$V_{DD}=2.7\text{V}$ to $3.6\text{V}$	-	-	0.8	V	
		$V_{DD}=4.5\text{V}$ to $5.5\text{V}$	-	-	$0.3 \times V_{DD}$	V	
HIGH-level output voltage	$V_{OH}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O = -100\mu\text{A}; V_{DD}=1.65\text{V}$ to $5.5\text{V}$	$V_{DD}-0.1$	-	-	V
			$I_O = -4\text{mA}; V_{DD}=1.65\text{V}$	0.95	-	-	V
			$I_O = -8\text{mA}; V_{DD}=2.3\text{V}$	1.7	-	-	V
			$I_O = -12\text{mA}; V_{DD}=2.7\text{V}$	1.9	-	-	V
			$I_O = -24\text{mA}; V_{DD}=3.0\text{V}$	2.0	-	-	V
			$I_O = -32\text{mA}; V_{DD}=4.5\text{V}$	3.4	-	-	V
LOW-level output voltage	$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O = 100\mu\text{A}; V_{DD}=1.65\text{V}$ to $5.5\text{V}$	-	-	0.1	V
			$I_O = 4\text{mA}; V_{DD}=1.65\text{V}$	-	-	0.70	V
			$I_O = 8\text{mA}; V_{DD}=2.3\text{V}$	-	-	0.45	V
			$I_O = 12\text{mA}; V_{DD}=2.7\text{V}$	-	-	0.60	V
			$I_O = 24\text{mA}; V_{DD}=3.0\text{V}$	-	-	0.80	V
			$I_O = 32\text{mA}; V_{DD}=4.5\text{V}$	-	-	0.80	V
input leakage current	$I_I$	$V_I = 5.5\text{V}$ or GND; $V_{DD} = 0\text{V}$ to $5.5\text{V}$	-	-	$\pm 1$	$\mu\text{A}$	
power-off leakage current	$I_{OFF}$	$V_I$ or $V_O = 5.5\text{V}; V_{DD} = 0\text{V}$	-	-	$\pm 2$	$\mu\text{A}$	
supply current	$I_{DD}$	$V_I = 5.5\text{V}$ or GND; $I_O = 0\text{A}; V_{DD} = 1.65\text{V}$ to $5.5\text{V}$	-	-	4	$\mu\text{A}$	
additional supply current	$\Delta I_{DD}$	per pin; $V_I = V_{DD} - 0.6\text{V}; I_O = 0\text{A}; V_{DD} = 2.3\text{V}$ to $5.5\text{V}$	-	-	500	$\mu\text{A}$	





### 3.3.3、AC Characteristics 1

( $T_{amb}=-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ. <sup>[1]</sup>	Max.	Unit	
A, B to Y propagation delay	$t_{PHL}$	see Figure 5	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	12.5	18.8	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	10.5	15.8	ns
			$V_{CC}=2.7\text{V}$	-	10	15	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	9.5	14.3	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	9	13.5	ns
A, B to Y propagation delay	$t_{PLH}$	see Figure 5	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	14	21	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	10	15	ns
			$V_{CC}=2.7\text{V}$	-	9.5	14.3	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	8.5	12.8	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	7.5	11.3	ns

Note:

[1] Typical values are measured at  $T_{amb}=25^{\circ}\text{C}$  and  $V_{DD}=1.8\text{V}$ ,  $2.5\text{V}$ ,  $2.7\text{V}$ ,  $3.3\text{V}$  and  $5.0\text{V}$  respectively.

### 3.3.4、AC Characteristics 2

( $T_{amb}=-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
A, B to Y propagation delay	$t_{PHL}$	see Figure 5	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	-	20.8	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	-	17.8	ns
			$V_{CC}=2.7\text{V}$	-	-	17	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	-	16.3	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	-	15.5	ns
A, B to Y propagation delay	$t_{PLH}$	see Figure 5	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	-	23	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	-	17	ns
			$V_{CC}=2.7\text{V}$	-	-	16.3	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	-	14.8	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	-	13.3	ns



## 4、Testing Circuit

### 4.1、AC Testing Circuit

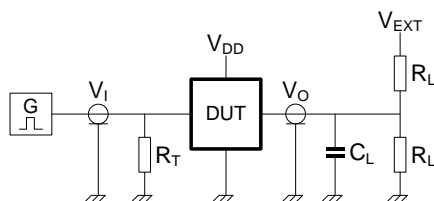


Figure 4. Test circuit for measuring switching times

Definitions for test circuit:

$R_L$ =Load resistance.

$C_L$ =Load capacitance including jig and probe capacitance.

$R_T$ =Termination resistance; should be equal to the output impedance  $Z_o$  of the pulse generator.

$V_{EXT}$ =External voltage for measuring switching times.

### 4.2、AC Testing Waveforms

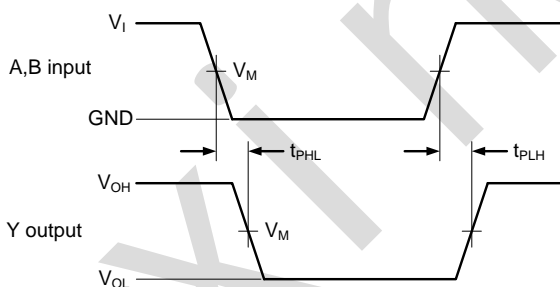


Figure 5. The input A, B to output Y propagation delays

### 4.3、Measurement Points

Supply voltage	Input	Output
$V_{DD}$	$V_M$	$V_M$
1.65V to 1.95V	$0.5 \times V_{DD}$	$0.5 \times V_{DD}$
2.3V to 2.7V	$0.5 \times V_{DD}$	$0.5 \times V_{DD}$
2.7V	1.5V	1.5V
3.0V to 3.6V	1.5V	1.5V
4.5V to 5.5V	$0.5 \times V_{DD}$	$0.5 \times V_{DD}$


### 4.4、Test Data

Supply voltage	Input		Load		$V_{EXT}$
	$V_I$	$t_r = t_f$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$
1.65V to 1.95V	$V_{DD}$	$\leq 3ns$	30pF	1k $\Omega$	open
2.3V to 2.7V	$V_{DD}$	$\leq 3ns$	30pF	500 $\Omega$	open
2.7V	2.7V	$\leq 3ns$	50pF	500 $\Omega$	open
3.0V to 3.6V	2.7V	$\leq 3ns$	50pF	500 $\Omega$	open
4.5V to 5.5V	$V_{DD}$	$\leq 3ns$	50pF	500 $\Omega$	open



## 5、Package Information

### 5.1、SOT23-5

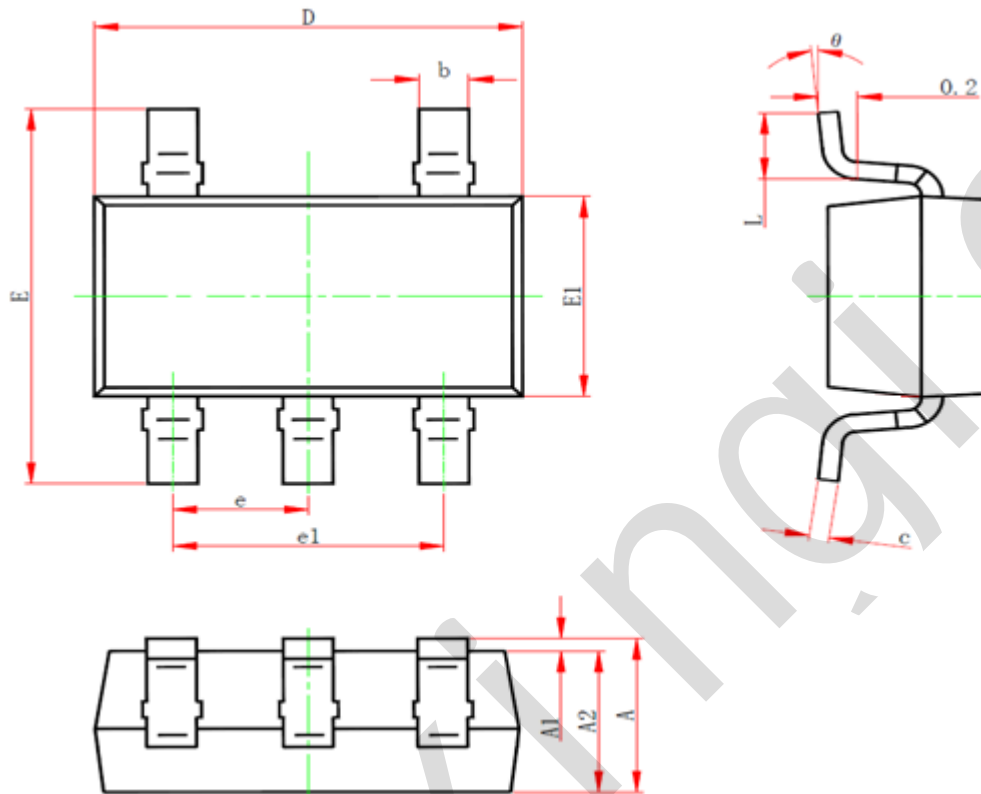


Symbol	Dimensions (mm)	
	Min.	Max.
A	-	1.26
A1	0.00	0.12
A2	1.00	1.20
b	0.30	0.50
c	0.10	0.20
D	2.82	3.02
E	2.60	3.00
E1	1.50	1.70
e	0.95	
e1	1.80	2.00
L	0.30	0.60
$\theta$	0°	8°



灵星芯微 勇芯无畏


5.2、SOT353

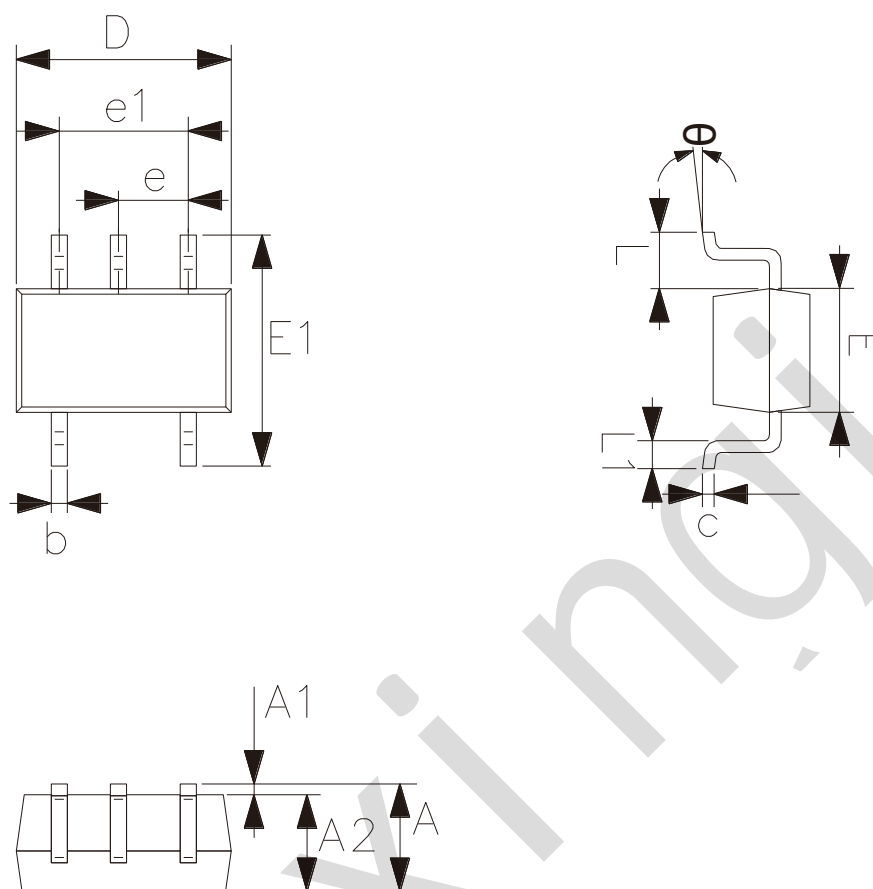

Symbol	Dimensions (mm)	
	Min.	Max.
A	0.90	1.10
A1	0.00	0.10
A2	0.90	1.00
b	0.15	0.35
c	0.11	0.175
D	2.00	2.20
E	1.15	1.35
E1	2.15	2.45
e	0.65	
e1	1.20	1.40
L	0.525	
L1	0.26	0.46
$\theta$	0°	8°



5.3、XSON6(1\*1\*0.45-0.35)

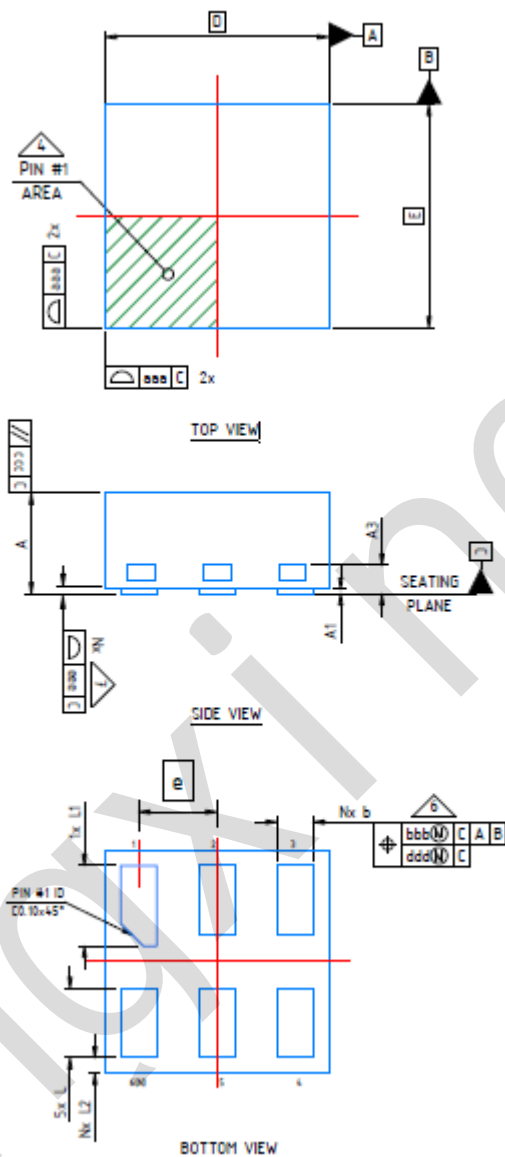

Symbol	Dimensions (mm)	
	Min.	Max.
A	0.41	0.50
A1	0.00	0.05
A3	0.127	
b	0.11	0.21
D	1.00	
E	1.00	
e	0.35	
L	0.26	0.36



深圳市灵星芯微电子科技有限公司

Shenzhen Lingxing Microelectronics Technology Co., Ltd.

Tab: 835-12-B4

Number:SN74LVC1G08-AX-LJ-B004EN

L1	0.31	0.41
L2	0.02	0.12

Lingxingic



## 6、Statements

### 6.1、The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	<p>○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard.</p> <p>×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.</p>									