



型号: KH-351525-TP


Rev.	ECN Number	Description	Date	Drawn	Checked	Approved

**技术要求:**

1. 材质: 不锈钢SUS304, T=0.10±0.005;
- ▼ 2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大0.03mm;
3. 扭曲: 4.5°/1000mm, 拱形: 5mm/1000mm;
4. 标示有"▼"符号的为重点控制和检验尺寸;
5. 未标注之R: MAX R0.13;
6. 电镀须满足48小时盐雾测试;
7. 寿命测试>2万次, 产品弹力要求在60gf~80gf之间
8. 镀底50 80u"min, 焊接区域镀金, 接触区域镀金3U"MIN

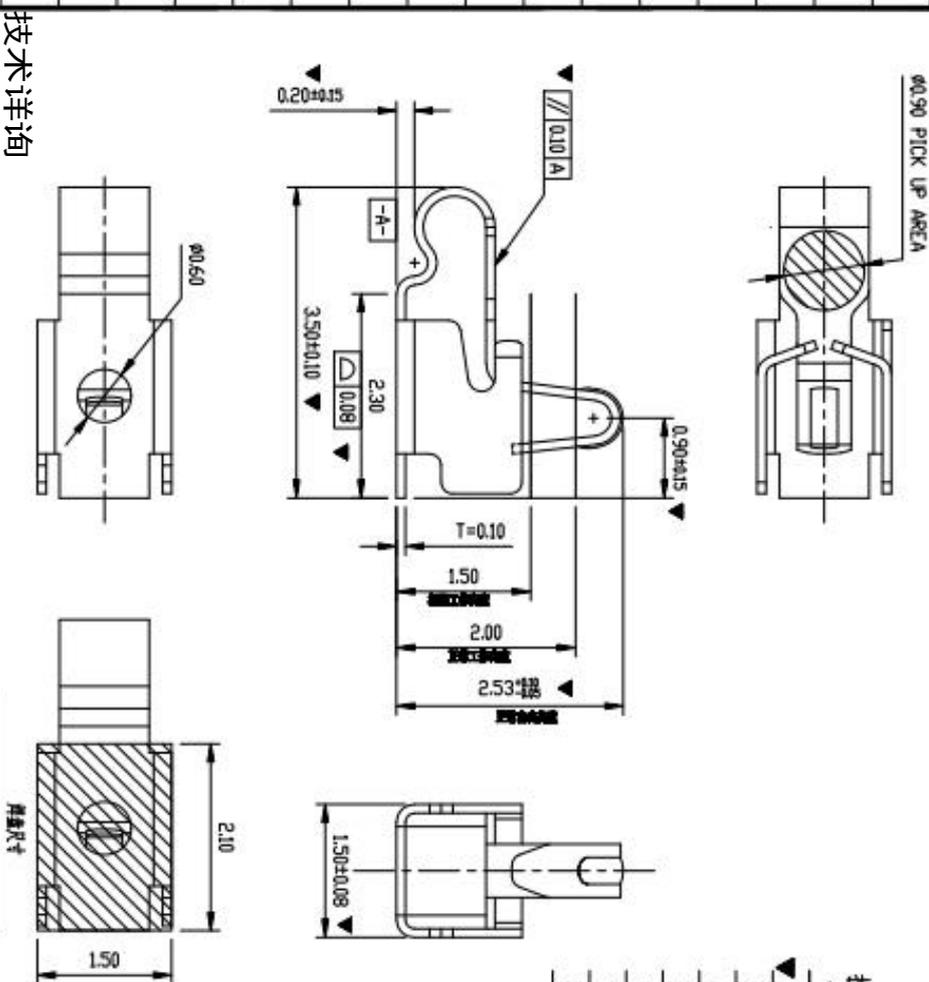

技术详询

		GENERAL TOLERANCE XX ±0.50 X ±0.35 .X ±0.25 .XX ±0.15		SCALE 1:1 UNIT mm SIZE A4		DRAWN CHECK APPROVE		DATE DATE DATE		DWG. NO. 681-0021A-1 PARTS NOT QUOTED USED FDX0021A1		REV. A SHEET 1/1	
尺寸公差 ±0.05 特殊尺寸		APPROVE		DATE		DATE		DATE		深圳市金航标电子 有限公司		REV. A SHEET 1/1	