

► Features


- $V_R=75V$
- $I_{F(AV)}=250mA$
- Power Dissipation of 150mW
- Fast switching speed
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

► Applications

For use in low voltage high frequency circuit signals.

► Mechanical Data

- Case: SOD-523
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

SOD-523


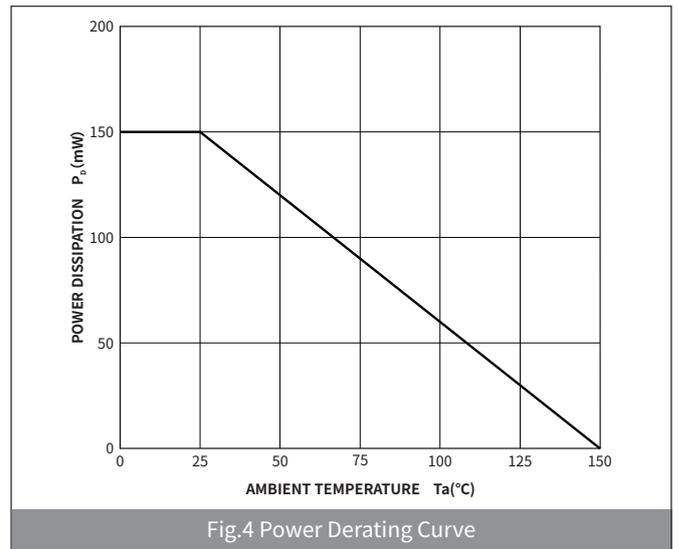
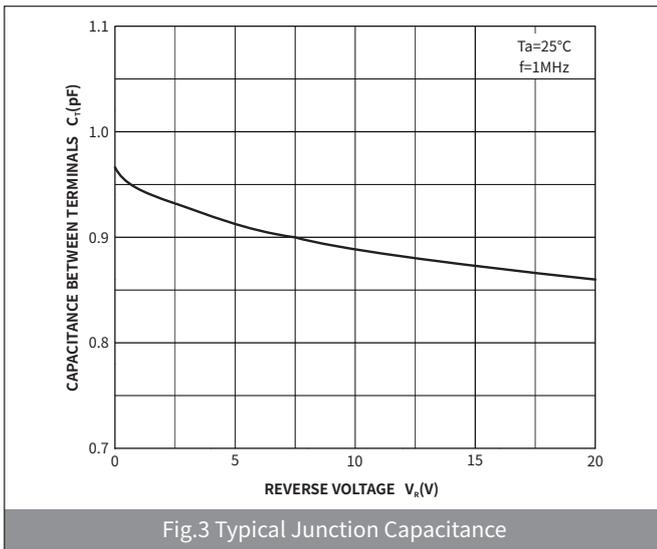
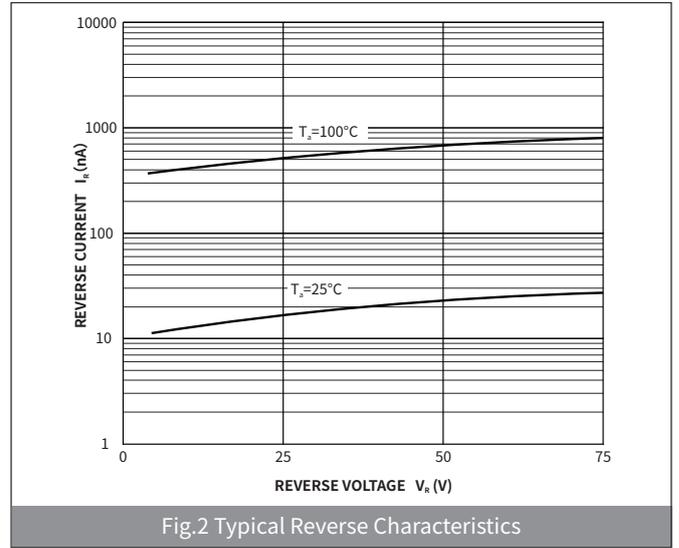
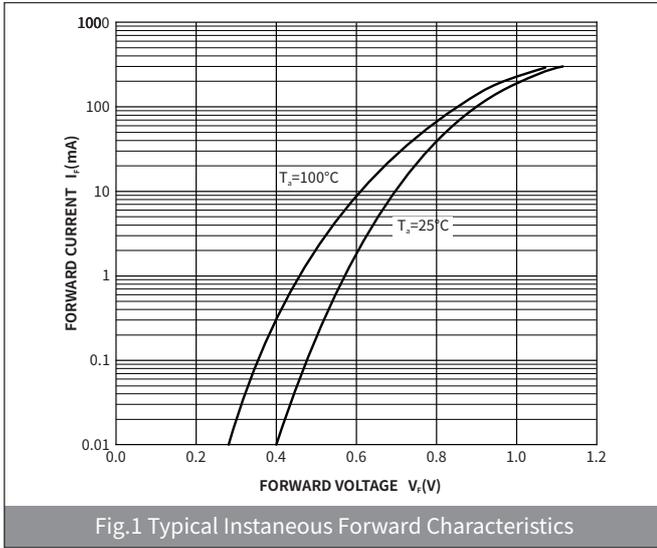
► Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Non-Repetitive Peak Reverse Voltage	V_{RM}	V	100
Maximum repetitive peak reverse voltage	V_{RRM}	V	75
Maximum RMS Voltage	V_{RMS}	V	75
Reverse Breakdown voltage @ $I_R=100\mu A$	$V_{(BR)R}$	V	75
Maximum Average Forward Rectified Current	$I_{F(AV)}$	mA	250
Repetitive peak forward current	I_{FRM}	mA	500
Non-Repetitive Peak forward surge current @ $t_p=1.0\mu s$	I_{FSM}	A	2.0
Non-Repetitive Peak forward surge current @ $t_p=1.0s$			1.0
Power Dissipation	P_d	mW	150
Storage temperature	T_{stg}	°C	-55 ~+150
Junction temperature	T_j	°C	-55 ~+150
Typical thermal resistance	$R_{\theta J-A}$	°C /W	833

► Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	Min	Max
Maximum instantaneous forward voltage	$I_F=1mA$	V_F	V	—	0.715
	$I_F=10mA$			—	0.855
	$I_F=50mA$			—	1.00
	$I_F=150mA$			—	1.25
Reverse Leakage Current	$V_R=25V$	I_{R1}	nA	—	30.0
	$V_R=75V$	I_{R2}	μA	—	1.0
Total capacitance	$V_R=0V, f=1MHz$	C_T	pF	—	1.0
Maximum reverse recovery time	$I_F=I_R=10mA, I_{rr}=0.1 \times I_R, R_L=100\Omega$	T_{rr}	ns	—	4.0

► **Ratings And Characteristics Curves** ($T_a=25^\circ\text{C}$ Unless otherwise specified)



▶ Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-523	R1	0.002	3000	45000	180000	7"

▶ Package Outline Dimensions (SOD-523)

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	1.10	1.30	0.044	0.052
B	0.25	0.35	0.01	0.014
C	1.50	1.70	0.06	0.068
D	0.50	0.70	0.02	0.028
E	0.70	0.90	0.028	0.036
F	0.05	0.20	0.002	0.008

▶ Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.60	-	0.023	-
K	-	1.10	-	0.042
M	0.80	-	0.031	-