




Specification for:
0P43615TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

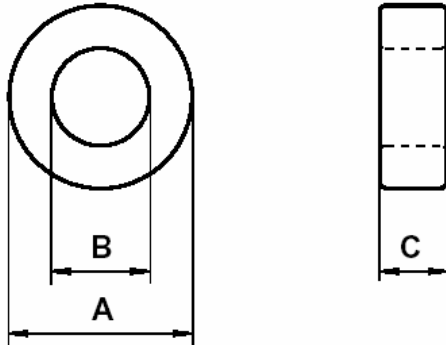

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	36	35.3	36.7
I.D. (B)	23	22.5	23.5
Ht. (C)	15	14.76	15.24

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
95.9	89.6	8596

INDUCTANCE

AL value (nH/T ²)	Test conditions
3366 ± 25%	10 kHz, 0.5 mT (For N = 5, use 1.7 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
1030 mW (119 mW/cm ³)	937 mW (109 mW/cm ³)	100 kHz, 100 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2005.04.25	Losses: General P Material	Losses: Detail as indicated